

UT SPOT TRACK Ø86 ON BOARD DIMMER INCLUDED

Number of heads	1
Mounting	Track mounting
Lamps description	LED Array High Performances 32,8W 3116 lm 3000K CRI 90
Luminaire luminous flux	See reference number
Voltage (V)	220/240
Environment	Indoor
Notes	FLOS three-phase lighting track luminaires are designed and fully tested for tracks recommended by FLOS. Compatibility is guaranteed with three-phase track produced by Nordic Aluminium. Compatibility with Eutrac under request.



OPTICAL

Reflector finish	Aluminum
Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	24° Medium

UT Spot Track Ø86 On Board Dimmer Included

designed by FLOS Architectural

Spotlight to be installed on 3-phase track, with LED light source. 220-240V, 50-60Hz power supply integrated.


ELECTRICAL

Transformer availability	Included
Transformer mounting	Integral
Transformer type	Electronic dimmable
Emergency	Without
Insulation class	Class II


● 09.4844.30A - 2089lm	White
● 09.4844.14A - 2089lm	Black

PHYSICAL

Spot diameter (mm)	86
Construction material	Aluminium
Weight (kg)	0,75



CERTIFICATIONS

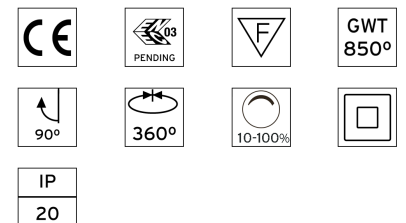

UT Spot Track Ø86 On Board Dimmer Included . Accessories

Optical



○ 08.8163.68

Elliptical lens

Elliptical light distribution lens in 4 mm thick tempered glass.



○ 08.8175.68

Flood lens

Flood lens made in press glass.



● 08.8495.14

Honeycomb

"Honeycomb" anti-glare screen: in thin, black-painted aluminium sheets.



● 08.8410.00

Holding ring

Holding ring



● 08.8411.00

Screening crosspiece




UT Spot Track Ø86 On Board Dimmer Included

designed by FLOS Architectural

Spotlight to be installed on 3-phase track, with LED light source. 220-240V, 50-60Hz power supply integrated.

- 09.4844.30A - 2089lm White
- 09.4844.14A - 2089lm Black



CERTIFICATIONS



UT Spot Track Ø86 On Board Dimmer Included . Lamps



LED Array

Lamp category:

LED

Socket:

Special base

Lamp type:

LED Array




UT Spot Track Ø86 On Board Dimmer Included

designed by FLOS Architectural

Spotlight to be installed on 3-phase track, with LED light source. 220-240V, 50-60Hz power supply integrated.

- 09.4844.30A - 2089lm White
- 09.4844.14A - 2089lm Black



CERTIFICATIONS

