

UT SPOT TRACK Ø86 DALI VERSION

Number of heads	1
Mounting	Track mounting
Lamps description	LED Array High Performances 32,8W 3246 lm 4000K CRI 90
Luminaire luminous flux	See reference number
Voltage (V)	220/240
Environment	Indoor
Notes	FLOS three-phase lighting track luminaires are designed and fully tested for tracks recommended by FLOS. Compatibility is guaranteed with three-phase track produced by Nordic Aluminium. Compatibility with Eutrac under request. FLOS three-phase DALI track luminaires are designed for Pulse DALI from Nordic Aluminium.

OPTICAL

Reflector finish	Aluminum
Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	12° Spot

ELECTRICAL

Transformer availability	Included
Transformer mounting	Integral
Transformer type	Electronic dimmable dali
Emergency	Without
Insulation class	Class II

PHYSICAL


Spot diameter (mm)	86
Construction material	Aluminium
Weight (kg)	1,18




UT Spot Track Ø86 Dali Version
designed by FLOS Architectural

Spotlight to be installed on 3-phase track, with LED light source. 220-240V, 50-60Hz power supply integrated.

- 09.4850.30ADA - 2281lm White
- 09.4850.14ADA - 2281lm Black



CERTIFICATIONS

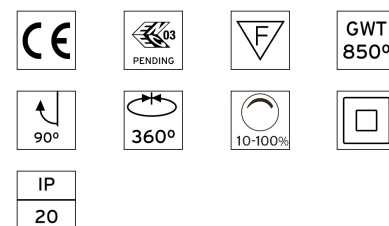

UT Spot Track Ø86 Dali Version . Accessories

Optical



○ 08.8163.68

Elliptical lens

Elliptical light distribution lens in 4 mm thick tempered glass.



○ 08.8175.68

Flood lens

Flood lens made in press glass.



● 08.8495.14

Honeycomb

"Honeycomb" anti-glare screen: in thin, black-painted aluminium sheets.



● 08.8410.00

Holding ring

Holding ring



● 08.8411.00

Screening crosspiece




UT Spot Track Ø86 Dali Version designed by FLOS Architectural

Spotlight to be installed on 3-phase track, with LED light source. 220-240V, 50-60Hz power supply integrated.

○ 09.4850.30ADA - 2281lm White

● 09.4850.14ADA - 2281lm Black



CERTIFICATIONS



UT Spot Track Ø86 Dali Version . Lamps



LED Array

Lamp category:

LED

Socket:

Special base

Lamp type:

LED Array




UT Spot Track Ø86 Dali Version
designed by FLOS Architectural

Spotlight to be installed on 3-phase track, with LED light source.
220-240V, 50-60Hz power supply integrated.

● 09.4850.30ADA - 2281lm White

● 09.4850.14ADA - 2281lm Black



CERTIFICATIONS

