

UT SPOT CEILING Ø86

Number of heads	1
Mounting	Ceiling surface
Lamps description	LED Array High Performances 32,8W 3116 lm 3000K CRI 90
Luminaire luminous flux	See reference number
Voltage (V)	220/240
Environment	Indoor

OPTICAL

Reflector finish	Aluminum
Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	12° Spot

ELECTRICAL

Transformer availability	Included
Transformer mounting	Remote
Transformer type	Electronic
Emergency	Without
Insulation class	Class II

PHYSICAL


Cutout diameter (mm)	90
Spot diameter (mm)	86
Construction material	Aluminium
Weight (kg)	1,66




UT Spot Ceiling Ø86 designed by FLOS Architectural

Spotlight to be installed on ceiling with LED light source. 220-240V, 50-60Hz remote power supply included.

● 09.4863.30A - 2190lm	White
● 09.4863.14A - 2190lm	Black



CERTIFICATIONS

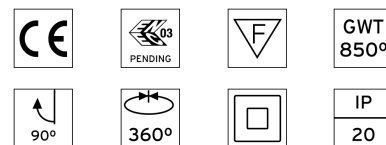

UT Spot Ceiling Ø86 . Accessories

Optical



08.8163.68

Elliptical lens

Elliptical light distribution lens in 4 mm thick tempered glass.



08.8175.68

Flood lens

Flood lens made in press glass.



08.8495.14

Honeycomb

"Honeycomb" anti-glare screen: in thin, black-painted aluminium sheets.



08.8410.00

Holding ring

Holding ring



08.8411.00


Screening crosspiece



UT Spot Ceiling Ø86 designed by FLOS Architectural

Spotlight to be installed on ceiling with LED light source. 220-240V, 50-60Hz remote power supply included.

09.4863.30A - 2190lm White
09.4863.14A - 2190lm Black



CERTIFICATIONS



UT Spot Ceiling Ø86 . Lamps



LED Array

Lamp category:

LED

Socket:

Special base

Lamp type:

LED Array




UT Spot Ceiling Ø86

designed by FLOS Architectural

Spotlight to be installed on ceiling with LED light source. 220-240V, 50-60Hz remote power supply included.

- 09.4863.30A - 2190lm White
- 09.4863.14A - 2190lm Black



CERTIFICATIONS

