

UT SPOT CEILING Ø86 DALI VERSION

Number of heads	1
Mounting	Ceiling surface
Lamps description	LED Array High Performances 32,8W 3246 lm 4000K CRI 90
Luminaire luminous flux	See reference number
Voltage (V)	220/240
Environment	Indoor



OPTICAL

Reflector finish	Aluminum
Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	37° Flood

UT Spot Ceiling Ø86 Dali Version designed by FLOS Architectural

Spotlight to be installed on ceiling with LED light source. 220-240V, 50-60Hz remote power supply included.


ELECTRICAL

Transformer availability	Included
Transformer mounting	Remote
Transformer type	Electronic dimmable dali
Emergency	Without
Insulation class	Class II


- 09.4872.30ADA - 2074lm White
- 09.4872.14ADA - 2074lm Black

PHYSICAL

Cutout diameter (mm)	90
Spot diameter (mm)	86
Construction material	Aluminium
Weight (kg)	1,66

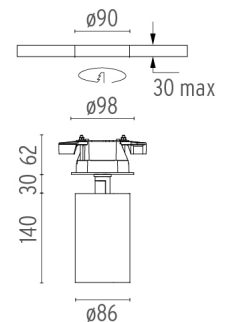

CERTIFICATIONS

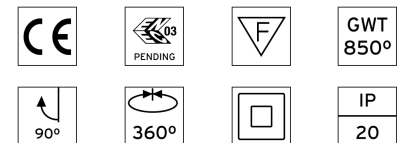

UT Spot Ceiling Ø86 Dali Version . Accessories

Optical



○ 08.8163.68

Elliptical lens

Elliptical light distribution lens in 4 mm thick tempered glass.



○ 08.8175.68

Flood lens

Flood lens made in press glass.



● 08.8495.14

Honeycomb

"Honeycomb" anti-glare screen: in thin, black-painted aluminium sheets.



● 08.8410.00

Holding ring

Holding ring



● 08.8411.00

Screening crosspiece




UT Spot Ceiling Ø86 Dali Version designed by FLOS Architectural

Spotlight to be installed on ceiling with LED light source. 220-240V, 50-60Hz remote power supply included.

○ 09.4872.30ADA - 2074lm White

● 09.4872.14ADA - 2074lm Black

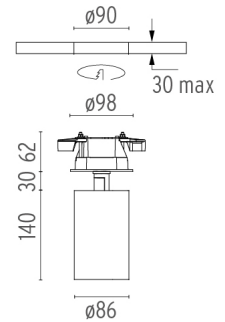

CERTIFICATIONS



UT Spot Ceiling Ø86 Dali Version . Lamps



LED Array

Lamp category:

LED

Socket:

Special base

Lamp type:

LED Array




UT Spot Ceiling Ø86 Dali Version
designed by FLOS Architectural

Spotlight to be installed on ceiling with LED light source. 220-240V, 50-60Hz remote power supply included.

● 09.4872.30ADA - 2074lm White

● 09.4872.14ADA - 2074lm Black

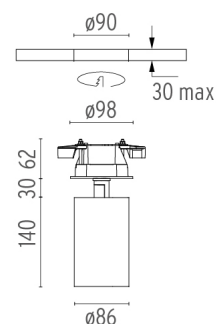

CERTIFICATIONS

