

UT SPOT TRACK MULTICHIP Ø86 ON BOARD DIMMER INCLUDED

Number of heads	1
Mounting	Track mounting
Lamps description	Top LED 11,5W 900 lm 3000K CRI 80
Luminaire luminous flux	See reference number
Voltage (V)	220/240
Environment	Indoor
Notes	FLOS three-phase lighting track luminaires are designed and fully tested for tracks recommended by FLOS. Compatibility is guaranteed with three-phase track produced by Nordic Aluminium. Compatibility with Eutrac under request.

OPTICAL

Reflector finish	Aluminum
Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	8° Super Spot

ELECTRICAL

Transformer availability	Included
Transformer mounting	Integral
Transformer type	Electronic dimmable
Emergency	Without
Insulation class	Class II

PHYSICAL

Spot diameter (mm)	86
Construction material	Aluminium
Weight (kg)	1,18




UT Spot Track Multichip Ø86 On Board Dimmer Included


designed by FLOS Architectural

Spotlight to be installed on 3-phase track, with LED light source. 220-240V, 50-60Hz power supply integrated.

● 09.4980.30 - 776lm	White
● 09.4980.14 - 776lm	Black



CERTIFICATIONS

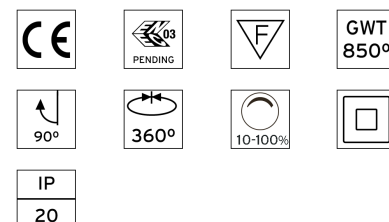

UT Spot Track Multichip Ø86 On Board Dimmer Included . Lamps



Top LED

Lamp category:

LED

Socket:

Special base

Lamp type:

Top LED




UT Spot Track Multichip Ø86 On Board Dimmer Included

designed by FLOS Architectural

Spotlight to be installed on 3-phase track, with LED light source.
220-240V, 50-60Hz power supply integrated.

●	09.4980.30 - 776lm	White
●	09.4980.14 - 776lm	Black



CERTIFICATIONS

