

SUPER FLAT SUSPENSION 30X30 DOWN DIMMABLE I-10V

Number of heads	1
Mounting	Pendant
Lamps description	Top LED 3000K CRI 80
Luminaire luminous flux	Extreme Cut-off. See reference number
Voltage (V)	220/240
Environment	Indoor
Notes	Total consumption of the system: 17W. Light source: max. 2210 lm. Luminous efficiency of luminaire: max. 130 lm/W.



OPTICAL

Light controller description	Protection glass
Aiming	Fixed
Light distribution symmetry	Symmetric
Beam angle	92°

Super Flat Suspension 30x30 Down Dimmable I-10V

designed by FLOS Architectural

General lighting LED luminaire to be suspended from ceiling. Power supply included.


ELECTRICAL

Transformer availability	Included
Transformer mounting	Integral
Transformer type	Electronic dimmable I-10V
Emergency	Without
Insulation class	Class II


- 09.5000.14AIV - 1242lm Black
- 09.5000.30AIV - 1242lm White
- 09.5000.02AIV - 1242lm Grey

PHYSICAL

Construction material	Extruded aluminum or Injected aluminum
Weight (kg)	1,83



CERTIFICATIONS

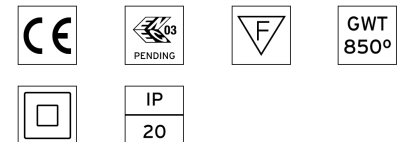

Super Flat Suspension 30x30 Down Dimmable I-10V . Lamps



Top LED

Lamp category:
LED

Socket:
Special base

Lamp type:
Top LED




**Super Flat Suspension 30x30
Down Dimmable I-10V**

designed by FLOS Architectural

General lighting LED luminaire to be suspended from ceiling. Power supply included.

- 09.5000.14AIV - 1242lm Black
- 09.5000.30AIV - 1242lm White
- 09.5000.02AIV - 1242lm Grey



CERTIFICATIONS

