

SUPER FLAT SUSPENSION 90X90 UP&DOWN NO DIMMABLE

Number of heads	1
Mounting	Pendant
Lamps description	Top LED 4000K CRI 80
Luminaire luminous flux	Extreme Cut-off. See reference number
Voltage (V)	220/240
Environment	Indoor
Notes	Total consumption of the system: 52W. Light source: Up: max. 3830 lm. Down: max. 3830 lm. Luminous efficiency of luminaire: max. 151 lm/W.

OPTICAL


Light controller description	Protection glass
Aiming	Fixed
Light distribution symmetry	Direct - Indirect
Beam angle	111°

ELECTRICAL

Transformer availability	Included
Transformer mounting	Integral
Transformer type	Electronic
Emergency	Without
Insulation class	Class I

PHYSICAL

Construction material	Extruded aluminum or Injected aluminum
Weight (kg)	8,30




Super Flat Suspension 90x90 Up&Down No Dimmable


designed by FLOS Architectural

General lighting LED luminaire, direct and indirect beam, to be suspended from ceiling. Power supply included.

● 09.5026.14A - 4802lm	Black
● 09.5026.30A - 4802lm	White
● 09.5026.02A - 4802lm	Grey

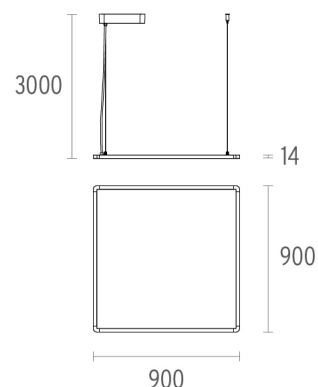

CERTIFICATIONS

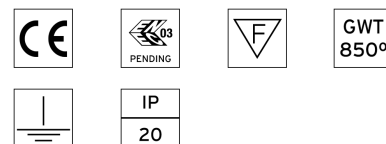

Super Flat Suspension 90x90 Up&Down No Dimmable . Lamps



Top LED

Lamp category:


LED

Socket:

Special base

Lamp type:

Top LED




Super Flat Suspension 90x90 Up&Down No Dimmable

designed by FLOS Architectural

General lighting LED luminaire, direct and indirect beam, to be suspended from ceiling. Power supply included.

●	09.5026.14A - 4802lm	Black
●	09.5026.30A - 4802lm	White
●	09.5026.02A - 4802lm	Grey

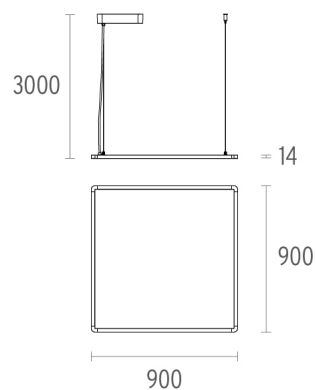

CERTIFICATIONS

