

SUPER FLAT SUSPENSION 120X20 DOWN DALI VERSION

Number of heads	1
Mounting	Pendant
Lamps description	Top LED 4000K CRI 80
Luminaire luminous flux	Extreme Cut-off. See reference number
Voltage (V)	220/240
Environment	Indoor
Notes	Total consumption of the system: 52W. Light source: max. 7660 lm. Luminous efficiency of luminaire: max. 151 lm/W.

OPTICAL

Light controller description	Protection glass
Aiming	Fixed
Light distribution symmetry	Symmetric
Beam angle	90°

ELECTRICAL

Transformer availability	Included
Transformer mounting	Integral
Transformer type	Electronic dimmable dali
Emergency	Without
Insulation class	Class I

PHYSICAL

Construction material	Extruded aluminum or Injected aluminum
Weight (kg)	3,28




Super Flat Suspension 120x20 Down Dali Version

designed by FLOS Architectural

General lighting LED luminaire to be suspended from ceiling. Power supply included.

- 09.5031.14ADA - 2715lm Black
- 09.5031.30ADA - 2715lm White
- 09.5031.02ADA - 2715lm Grey

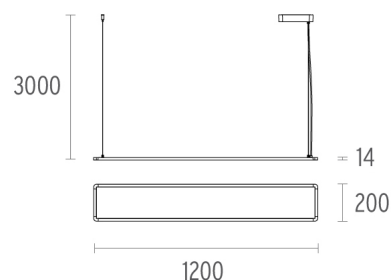

CERTIFICATIONS



Super Flat Suspension 120x20 Down Dali Version . Lamps



Top LED

Lamp category:

LED

Socket:

Special base

Lamp type:

Top LED




Super Flat Suspension 120x20 Down Dali Version

designed by FLOS Architectural

General lighting LED luminaire to be suspended from ceiling. Power supply included.

- 09.5031.14ADA - 2715lm Black
- 09.5031.30ADA - 2715lm White
- 09.5031.02ADA - 2715lm Grey

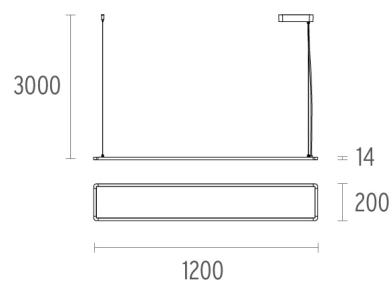

CERTIFICATIONS

