

## SUPER FLAT SUSPENSION 120X30 UP&DOWN NO DIMMABLE

<b>Number of heads</b>	1
<b>Mounting</b>	Pendant
<b>Lamps description</b>	Top LED 4000K CRI 80
<b>Luminaire luminous flux</b>	Extreme Cut-off. See reference number
<b>Voltage (V)</b>	220/240
<b>Environment</b>	Indoor
<b>Notes</b>	Total consumption of the system: 55W. Light source: Up: max. 3830 lm. Down: max. 3830 lm. Luminous efficiency of luminaire: max. 151 lm/W.



### OPTICAL

<b>Light controller description</b>	Protection glass
<b>Aiming</b>	Fixed
<b>Light distribution symmetry</b>	Direct - Indirect
<b>Beam angle</b>	109°

### Super Flat Suspension 120x30 Up&Down No Dimmable

designed by FLOS Architectural

General lighting LED luminaire, direct and indirect beam, to be suspended from ceiling. Power supply included.


### ELECTRICAL

<b>Transformer availability</b>	Included
<b>Transformer mounting</b>	Integral
<b>Transformer type</b>	Electronic
<b>Emergency</b>	Without
<b>Insulation class</b>	Class I

● 09.5046.14A - 4523lm	Black
● 09.5046.30A - 4523lm	White
● 09.5046.02A - 4523lm	Grey

### PHYSICAL

<b>Construction material</b>	Extruded aluminum or Injected aluminum
<b>Weight (kg)</b>	4,20

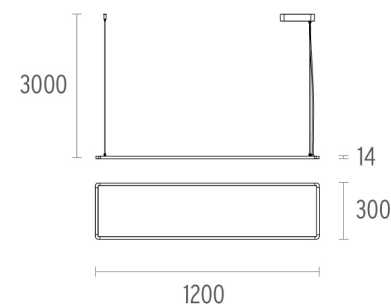

### CERTIFICATIONS



## Super Flat Suspension 120x30 Up&Down No Dimmable . Lamps



### Top LED

#### Lamp category:


LED

#### Socket:

Special base

#### Lamp type:

Top LED

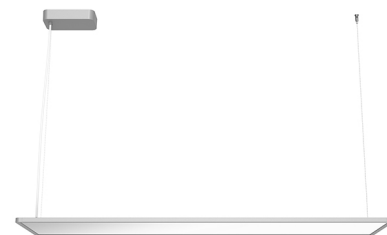


### Super Flat Suspension 120x30 Up&Down No Dimmable

designed by FLOS Architectural

General lighting LED luminaire, direct and indirect beam, to be suspended from ceiling. Power supply included.

●	09.5046.14A - 4523lm	Black
●	09.5046.30A - 4523lm	White
●	09.5046.02A - 4523lm	Grey

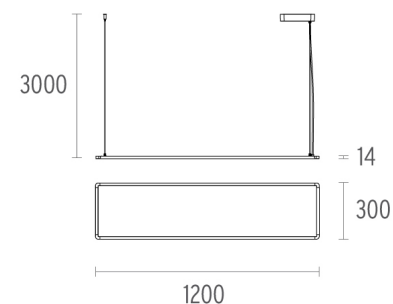

### CERTIFICATIONS

