

SUPER FLAT SURFACE 120X20 NO DIMMABLE

Number of heads	1
Mounting	Ceiling surface
Lamps description	Top LED 4000K CRI 80
Luminaire luminous flux	Extreme Cut-off. See reference number
Voltage (V)	220/240
Environment	Indoor
Notes	Total consumption of the system: 52W. Light source: max. 7660 lm. Luminous efficiency of luminaire: max. 151 lm/W.

OPTICAL

Light controller description	Protection glass
Aiming	Fixed
Light distribution symmetry	Symmetric
Beam angle	90°

ELECTRICAL

Transformer availability	Included
Transformer mounting	Integral
Transformer type	Electronic
Emergency	Without
Insulation class	Class I

PHYSICAL


Construction material	Extruded aluminum or Injected aluminum
Weight (kg)	4,88



Super Flat Surface 120x20 No Dimmable
designed by FLOS Architectural

Surface mounted general lighting LED
luminaire. Power supply included.

●	09.6031.14A - 2715lm	Black
●	09.6031.30A - 2715lm	White
●	09.6031.02A - 2715lm	Grey

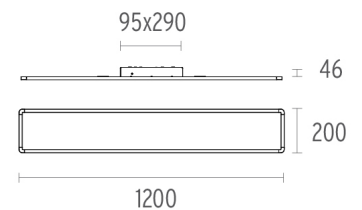

CERTIFICATIONS



Super Flat Surface 120x20 No Dimmable . Lamps



Top LED

Lamp category:
LED

Socket:
Special base


Lamp type:
Top LED



Super Flat Surface 120x20 No Dimmable
designed by FLOS Architectural

Surface mounted general lighting LED
luminaire. Power supply included.

-
- | | | |
|---|----------------------|-------|
| ● | 09.6031.14A - 2715lm | Black |
| ● | 09.6031.30A - 2715lm | White |
| ● | 09.6031.02A - 2715lm | Grey |
-



CERTIFICATIONS

