

SUPER FLAT SURFACE 120X20 DALI VERSION

Number of heads	1
Mounting	Ceiling surface
Lamps description	Top LED 4000K CRI 80
Luminaire luminous flux	Extreme Cut-off. See reference number
Voltage (V)	220/240
Environment	Indoor
Notes	Total consumption of the system: 52W. Light source: max. 7660 lm. Luminous efficiency of luminaire: max. 151 lm/W.

OPTICAL

Light controller description	Protection glass
Aiming	Fixed
Light distribution symmetry	Symmetric
Beam angle	90°

ELECTRICAL

Transformer availability	Included
Transformer mounting	Integral
Transformer type	Electronic dimmable dali
Emergency	Without
Insulation class	Class I

PHYSICAL

Construction material	Extruded aluminum or Injected aluminum
Weight (kg)	4,88




Super Flat Surface 120x20 Dali Version

designed by FLOS Architectural

Surface mounted general lighting LED luminaire. Power supply included.

- 09.6031.14ADA - 2715lm Black
- 09.6031.30ADA - 2715lm White
- 09.6031.02ADA - 2715lm Grey

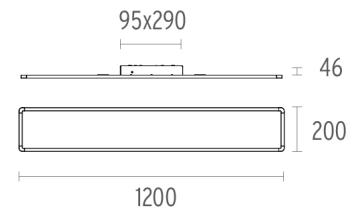

CERTIFICATIONS



Super Flat Surface 120x20 Dali Version . Lamps



Top LED

Lamp category:

LED

Socket:

Special base

Lamp type:

Top LED




Super Flat Surface 120x20 Dali Version

designed by FLOS Architectural

Surface mounted general lighting LED luminaire. Power supply included.

- 09.6031.14ADA - 2715lm Black
- 09.6031.30ADA - 2715lm White
- 09.6031.02ADA - 2715lm Grey



CERTIFICATIONS

