

## SUPER FLAT SURFACE 120X30 DALI VERSION

<b>Number of heads</b>	1
<b>Mounting</b>	Ceiling surface
<b>Lamps description</b>	Top LED 4000K CRI 80
<b>Luminaire luminous flux</b>	Extreme Cut-off. See reference number
<b>Voltage (V)</b>	220/240
<b>Environment</b>	Indoor
<b>Notes</b>	Total consumption of the system: 51W. Light source: max. 7660 lm. Luminous efficiency of luminaire: max. 151 lm/W.

### OPTICAL

<b>Light controller description</b>	Protection glass
<b>Aiming</b>	Fixed
<b>Light distribution symmetry</b>	Symmetric
<b>Beam angle</b>	90°

### ELECTRICAL

<b>Transformer availability</b>	Included
<b>Transformer mounting</b>	Integral
<b>Transformer type</b>	Electronic dimmable dali
<b>Emergency</b>	Without
<b>Insulation class</b>	Class I

### PHYSICAL

<b>Construction material</b>	Extruded aluminum or Injected aluminum
<b>Weight (kg)</b>	5,80




### Super Flat Surface 120x30 Dali Version


designed by FLOS Architectural

Surface mounted general lighting LED luminaire. Power supply included.

- 09.6041.14ADA - 3893lm Black
- 09.6041.30ADA - 3893lm White
- 09.6041.02ADA - 3893lm Grey

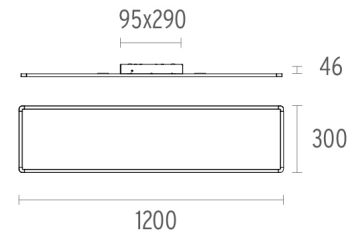

### CERTIFICATIONS

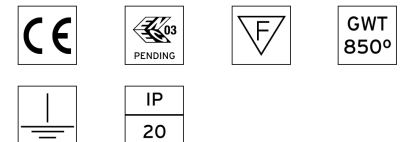

## Super Flat Surface 120x30 Dali Version . Lamps



### Top LED

#### Lamp category:

LED

#### Socket:

Special base

#### Lamp type:

Top LED




### Super Flat Surface 120x30 Dali Version

designed by FLOS Architectural

Surface mounted general lighting LED luminaire. Power supply included.

- 09.6041.14ADA - 3893lm Black
- 09.6041.30ADA - 3893lm White
- 09.6041.02ADA - 3893lm Grey



### CERTIFICATIONS

