FLOS

UT PRO 150 ON BOARD DIMMER INCLUDED

Number of heads

Mounting Track mounting

Lamps description LED Array 23,5W 2300 lm 3000K CRI 80

Luminaire luminous flux See reference number

Voltage (V) 120/270 Environment Indoor

Notes Screening crosspiece, lenses and honeycomb directly

installable on the head of the luminaire without needing any fastening accessory. Installation compatible with

honeycomb + lense at the same time.

OPTICAL

Reflector finish Borosilicate glass reflector

Aiming Adjustable
Light distribution symmetry Symmetric
Beam angle 16° Spot

ELECTRICAL

Transformer availability Included
Transformer mounting Integral


Transformer type Electronic dimmable

Emergency Without Insulation class Class I

PHYSICAL

Spot diameter (mm) 57


Construction material Aluminium Weight (kg) 0,52

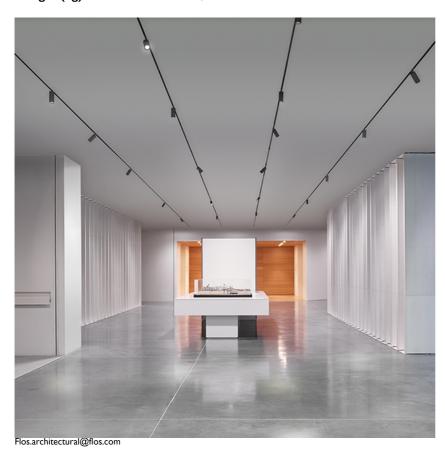




UT Pro 150 On Board Dimmer Included designed by FLOS Architectural

Spotlight to be installed in Tracking Power profile with LED light source. I 20-270V power supply integrated.<nextline>





CERTIFICATIONS
























UT Pro 150 On Board Dimmer Included. Accessories

Optical












Screening Crosspiece

08.8431.00

08.8432.00



Flood Lens



09.7210.14A - 2265lm

UT Pro 150 On Board Dimmer Included designed by FLOS Architectural








08.0526.00

Honeycomb **Snoot Shielding Cone**



Black

CERTIFICATIONS


















ΙP 20



Flos.architectural@flos.com



UT Pro 150 On Board Dimmer Included . Lamps



LED Array

Lamp category:

LED

Socket:

Special base

Lamp type:


LED Array



UT Pro 150 On Board Dimmer Included designed by FLOS Architectural

Spotlight to be installed in Tracking Power profile with LED light source. I 20-270V power supply integrated.<nextline>

09.7210.40A - 2265lm White 09.7210.14A - 2265lm Black



CERTIFICATIONS



















