

### **UT PRO 150 ON BOARD DIMMER INCLUDED**

Number of heads

Mounting Track mounting

Lamps description LED Array 23,5W 2300 lm 3000K CRI 80

Luminaire luminous flux See reference number

Voltage (V) 120/270 Environment Indoor

Notes Screening crosspiece, lenses and honeycomb directly installable on the head of the luminaire without needing

any fastening accessory. Installation compatible with

honeycomb + lense at the same time.

## **OPTICAL**

Reflector finish Borosilicate glass reflector

Aiming Adjustable
Light distribution symmetry Symmetric
Beam angle 28° Medium

#### **ELECTRICAL**

Transformer availability Included
Transformer mounting Integral


Transformer type Electronic dimmable

Emergency Without Insulation class Class I

#### **PHYSICAL**

Spot diameter (mm) 57


Construction material Aluminium Weight (kg) 0,52

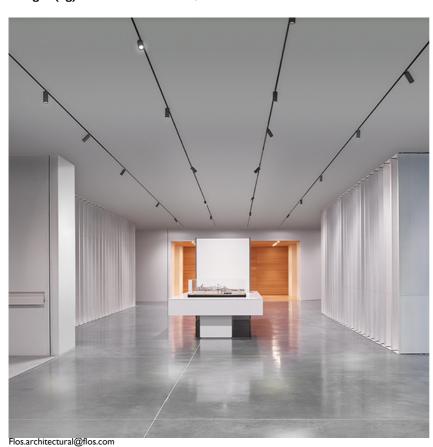




**UT Pro 150 On Board Dimmer Included** designed by FLOS Architectural

Spotlight to be installed in Tracking Power profile with LED light source. I 20-270V power supply integrated.<nextline>





### **CERTIFICATIONS**



















www.flos.com



## **UT Pro 150 On Board Dimmer Included. Accessories**

## **Optical**







08.8429.00

08.8431.00

08.8432.00

**Screening Crosspiece** 

**Elliptical Lens** 

Flood Lens





08.8428.00

Honeycomb

08.0526.00


**Snoot Shielding Cone** 



**UT Pro 150 On Board Dimmer Included** designed by FLOS Architectural

Spotlight to be installed in Tracking Power profile with LED light source. I 20-270V power supply integrated.<nextline>

09.7212.40A - 2197lm White 09.7212.14A - 2197lm Black



# CERTIFICATIONS

















IP 20

Flos.architectural@flos.com www.flos.com



# **UT Pro 150 On Board Dimmer Included . Lamps**



**LED Array** 

Lamp category:

LED

Socket:

Special base

Lamp type:


LED Array



**UT Pro 150 On Board Dimmer Included** designed by FLOS Architectural

Spotlight to be installed in Tracking Power profile with LED light source. I 20-270V power supply integrated.<nextline>

09.7212.40A - 2197lm White 09.7212.14A - 2197lm Black



# CERTIFICATIONS

















IP 20