

UT PRO 150 ON BOARD DIMMER INCLUDED

Number of heads	1
Mounting	Track mounting
Lamps description	LED Array 23,5W 2009 lm 4000K CRI 90
Luminaire luminous flux	See reference number
Voltage (V)	120/270
Environment	Indoor
Notes	Screening crosspiece, lenses and honeycomb directly installable on the head of the luminaire without needing any fastening accessory. Installation compatible with honeycomb + lense at the same time.



OPTICAL

Reflector finish	Borosilicate glass reflector
Aiming	Adjustable
Light distribution symmetry	Symmetric
Beam angle	28° Medium

UT Pro 150 On Board Dimmer Included
designed by FLOS Architectural

Spotlight to be installed in Tracking Power profile with LED light source. 120-270V power supply integrated.< nextline>


ELECTRICAL

Transformer availability	Included
Transformer mounting	Integral
Transformer type	Electronic dimmable
Emergency	Without
Insulation class	Class I


- 09.7213.40A - 1892lm White
- 09.7213.14A - 1892lm Black

PHYSICAL

Spot diameter (mm)	57
Construction material	Aluminium
Weight (kg)	0,52



CERTIFICATIONS

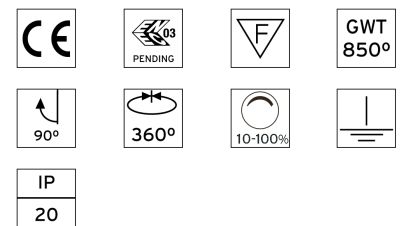

UT Pro I50 On Board Dimmer Included . Accessories

Optical



● 08.8429.00
Screening Crosspiece



○ 08.8431.00
Elliptical Lens



○ 08.8432.00
Flood Lens



● 08.8428.00
Honeycomb




● 08.0526.00
Snoot Shielding Cone




UT Pro I50 On Board Dimmer Included
designed by FLOS Architectural

Spotlight to be installed in Tracking Power profile with LED light source. 120-270V power supply integrated.< nextline>

- 09.7213.40A - 1892lm White
- 09.7213.14A - 1892lm Black



CERTIFICATIONS

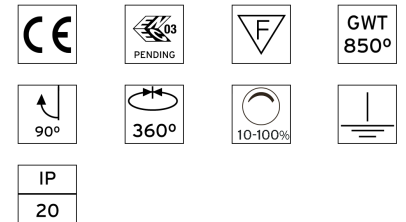

UT Pro 150 On Board Dimmer Included . Lamps



LED Array

Lamp category:

LED

Socket:

Special base

Lamp type:


LED Array



UT Pro 150 On Board Dimmer Included
designed by FLOS Architectural

Spotlight to be installed in Tracking Power profile with LED light source. 120-270V power supply integrated.< nextline>

- 09.7213.40A - 1892lm White
- 09.7213.14A - 1892lm Black



CERTIFICATIONS

