

#### **UT PRO 150 ON BOARD DIMMER INCLUDED**

**Number of heads** 

**Mounting** Track mounting

LED Array 23,5W 1950 lm 3000K CRI 90 Lamps description

Luminaire luminous flux See reference number

Voltage (V) 120/270 **Environment** Indoor

Screening crosspiece, lenses and honeycomb directly installable on the head of the luminaire without needing Notes

any fastening accessory. Installation compatible with

honeycomb + lense at the same time.

## **OPTICAL**

**Reflector finish** Borosilicate glass reflector

**Aiming** Adjustable Light distribution symmetry Symmetric Beam angle 16° Spot

#### **ELECTRICAL**

Transformer availability Included **Transformer mounting** Integral


Transformer type Electronic dimmable

Without **Emergency Insulation class** Class I

#### **PHYSICAL**

Spot diameter (mm) 57

**Construction material** Aluminium Weight (kg) 0,52

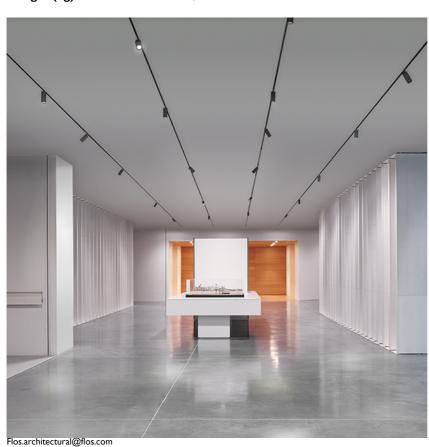




UT Pro 150 On Board Dimmer Included designed by FLOS Architectural

Spotlight to be installed in Tracking Power profile with LED light source. 120-270V power supply integrated. nextline>





#### **CERTIFICATIONS**



















www.flos.com



## **UT Pro 150 On Board Dimmer Included. Accessories**

## **Optical**







08.8429.00

08.8431.00

08.8432.00

Screening Crosspiece Elliptical Lens

Flood Lens





08.8428.00

Honeycomb

08.0526.00


**Snoot Shielding Cone** 



**UT Pro 150 On Board Dimmer Included** designed by FLOS Architectural

Spotlight to be installed in Tracking Power profile with LED light source. I 20-270V power supply integrated.<nextline>

09.7216.40A - 1871lm White 09.7216.14A - 1871lm Black



## **CERTIFICATIONS**

















IP 20

Flos.architectural@flos.com www.flos.com



# UT Pro 150 On Board Dimmer Included . Lamps



**LED Array** 

Lamp category:

LED

Socket:

Special base

Lamp type:


LED Array



**UT Pro 150 On Board Dimmer Included** designed by FLOS Architectural

Spotlight to be installed in Tracking Power profile with LED light source. I 20-270V power supply integrated.<nextline>

09.7216.40A - 1871lm White 09.7216.14A - 1871lm Black



## **CERTIFICATIONS**











IP 20







Flos.architectural@flos.com www.flos.com