

#### **UT PRO 175 GA-69 ON BOARD DIMMER INCLUDED**

Number of heads

Mounting Track mounting GA

Lamps description LED Array 35,3W 3250 lm 3000K CRI 90

Luminaire luminous flux See reference number

Voltage (V) 120/270 Environment Indoor

Notes Screening crosspiece, lenses and honeycomb directly installable on the head of the luminaire without needing

any fastening accessory. Installation compatible with

honeycomb + lense at the same time.

#### **OPTICAL**

Reflector finish Borosilicate glass reflector

Aiming Adjustable
Light distribution symmetry Symmetric
Beam angle 25° Medium

#### **ELECTRICAL**

Transformer availability Included Transformer mounting Integral


Transformer type Electronic dimmable

Emergency Without Insulation class Class I

#### **PHYSICAL**

Spot diameter (mm) 75

Construction material Aluminium

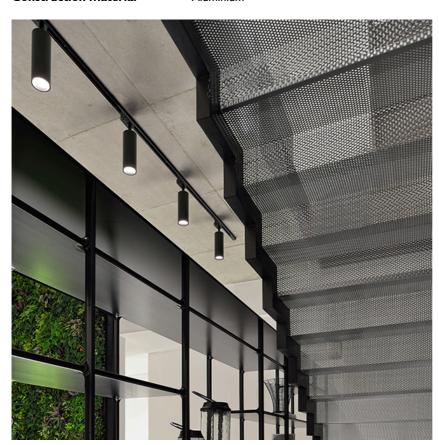




# UT Pro 175 GA-69 On Board Dimmer Included

designed by FLOS Architectural

Spotlight to be installed in standard 3phase track with LED light source. I 20-270V power supply integrated.< nextline>

09.7314.40 - 2895lm White
09.7314.14 - 2895lm Black





#### **CERTIFICATIONS**

















IP 20

Flos.architectural@flos.com www.flos.com



#### UT Pro 175 GA-69 On Board Dimmer Included . Accessories

#### **Optical**







08.9108.00

**Screening Crosspiece** 

08.9109.00

08.9110.00

**Elliptical Lens** 

Flood Lens





08.9107.00

Honeycomb

08.9111.00

**Snoot Shielding Cone** 



# UT Pro 175 GA-69 On Board Dimmer Included

designed by FLOS Architectural


Spotlight to be installed in standard 3phase track with LED light source. 120-270V power supply integrated. nextline>

09.7314.40 - 2895lm

White

09.7314.14 - 2895lm

Black





## **CERTIFICATIONS**

















ΙP 20



# UT Pro 175 GA-69 On Board Dimmer Included . Lamps



**LED Array** 

Lamp category:

LED

Socket:

Special base

Lamp type:

LED Array




# UT Pro 175 GA-69 On Board Dimmer Included

designed by FLOS Architectural

Spotlight to be installed in standard 3phase track with LED light source. I 20-270V power supply integrated.< nextline>

09.7314.40 - 2895lm White
09.7314.14 - 2895lm Black



## **CERTIFICATIONS**

















IP 20