

LIGHTLIGHT® PEND/CEILING-SPOT 5|MINITUBE

Number of heads	1
Mounting	LightLight® Pend/Ceiling
Lamps description	QR-CBC 25 clear/frosted GZ4 20/35W
Voltage (V)	12
Environment	Indoor

OPTICAL

Light controller description	Bare lamps
Aiming	Directional
Light distribution symmetry	Symmetric
Beam angle	60°

ELECTRICAL

Transformer availability	Separate item
Transformer mounting	Remote
Emergency	Without
Insulation class	Class III

PHYSICAL

Height (mm)	49
Spot diameter (mm)	30
Construction material	Aluminium
Weight (kg)	0,06




LightLight® Pend/Ceiling-Spot 5|Minitube

designed by Hans Buschfeld

Spotlight to be installed on 12V pending or ceiling track system. Track adapter integrated.

	BU32405A	Anodised aluminium
	BU32405B	Black
	BU32405P	Polished aluminium

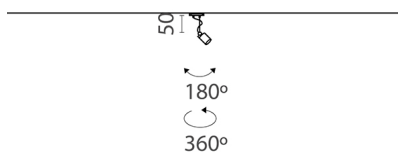

CERTIFICATIONS



LightLight® Pend/Ceiling-Spot 5|Minitube . Lamps



BU62

QR-CBC 25

Lamp Watt:
20 W

Lamp category:
Halogen low voltage

Socket:
GZ4

Lamp angle:
40 °

Color temperature (K):
3000 °K

Catalog reference:
BU62

Lamp type:
QR-CBC 25



BU68

QR-CBC 25

Lamp Watt:
35 W

Lamp category:
Halogen low voltage

Socket:
GZ4

Lamp angle:
44 °

Color temperature (K):
3000 °K

Catalog reference:
BU68

Lamp type:
QR-CBC 25



BU61

QR-CBC 25

Lamp Watt:
20 W

Lamp category:
Halogen low voltage

Socket:
GZ4

Lamp angle:
21 °

Color temperature (K):
3000 °K

Catalog reference:
BU61

Lamp type:
QR-CBC 25



BU64

QR-CBC 25

Lamp Watt:
35 W

Lamp category:
Halogen low voltage

Socket:
GZ4

Lamp angle:
24 °

Color temperature (K):
3000 °K

Catalog reference:
BU64

Lamp type:
QR-CBC 25




LightLight® Pend/Ceiling-Spot 5|Minitube

designed by Hans Buschfeld

Spotlight to be installed on 12V
pending or ceiling track system. Track
adapter integrated.

	BU32405A	Anodised aluminium
	BU32405B	Black
	BU32405P	Polished aluminium

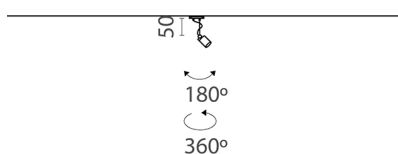

CERTIFICATIONS

