

FLOS

LIGHTLIGHT® PEND/CEILING-MAX|DISC III

Number of heads	1
Mounting	LightLight® Pend/Ceiling
Lamps description	QR-III G53 35/50/60W or LED QR-III
Voltage (V)	12
Environment	Indoor
Notes	Please ask Flos architectural sales team about QR-III lamps LED retrofit compatibility.

OPTICAL

Light controller description	Bare lamps
Aiming	Directional
Light distribution symmetry	Symmetric
Beam angle	24°

ELECTRICAL

Transformer availability	Separate item
Transformer mounting	Remote
Emergency	Without
Insulation class	Class III





PHYSICAL


Spot diameter (mm)	115
Construction material	Aluminium
Weight (kg)	0,11




LightLight® Pend/Ceiling-Max|Disc III
designed by Hans Buschfeld

Spotlight to be installed on 12V
pending or ceiling track system. Track
adaptor integrated.

	BU60050W	White
	BU60050A	Anodised aluminium
	BU60050B	Black
	BU60050P	Polished aluminium




CERTIFICATIONS



LightLight® Pend/Ceiling-Max|Disc III . Accessories




Optical



● RF18557

Honeycomb anti-glare screen

"Honeycomb" anti-glare screen: in thin, black-painted aluminium sheets.



● BU60021

● BU60022

Honeycomb anti-glare screen. Halogen

"Honeycomb" anti-glare screen in black painted or silver aluminium sheets for halogen light sources.



● BU60023

● BU60024

Honeycomb anti-glare screen. LED

"Honeycomb" anti-glare screen in black painted or silver aluminium sheets for LED light sources.

LightLight® Pend/Ceiling-Max|Disc III
designed by Hans Buschfeld

Spotlight to be installed on 12V
pendung or ceiling track system. Track
adapater integrated.

● BU60050W	White
● BU60050A	Anodised aluminium
● BU60050B	Black
● BU60050P	Polished aluminium

LightLight® Pend/Ceiling-Max|Disc III . Lamps



60.6398

QR-III

Lamp Watt:
35 W

Lamp category:
Halogen low voltage

Socket:
G53

Lamp angle:
24 °

Color temperature (K):
3000 °K

Catalog reference:
60.6398

Lamp type:
QR-III



60.6374

QR-III

Lamp Watt:
50 W

Lamp category:
Halogen low voltage

Socket:
G53

Lamp angle:
24 °

Color temperature (K):
3000 °K

Catalog reference:
60.6374

Lamp type:
QR-III



60.6863

QR-III

Lamp Watt:
60 W

Lamp category:
Halogen low voltage


Socket:
G53

Lamp angle:
8 °


Color temperature (K):
3000 °K

Catalog reference:
60.6863

Lamp type:
QR-III



CERTIFICATIONS

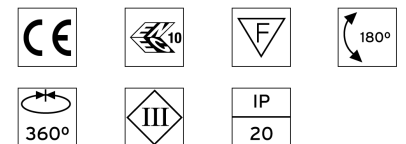

LightLight® Pend/Ceiling-Max|Disc III . Lamps



60.6864

QR-III

Lamp Watt:
60 W

Lamp category:
Halogen low voltage

Socket:
G53

Lamp angle:
24 °

Color temperature (K):
3000 °K

Catalog reference:
60.6864

Lamp type:
QR-III

60.6962

LED QR-III

Lamp Watt:
12 W

Lamp category:
LED

Socket:
G53

Lamp angle:
24 °

Color temperature (K):
2800 °K

Catalog reference:
60.6962

Lamp type:
LED QR-III

60.6989

QR-III

Lamp Watt:
50 W

Lamp category:
Halogen low voltage

Socket:
G53

Lamp angle:
6 °





Color temperature (K):
3000 °K


Catalog reference:
60.6989

Lamp type:
QR-III

LightLight® Pend/Ceiling-Max|Disc III
designed by Hans Buschfeld

Spotlight to be installed on 12V
pending or ceiling track system. Track
adapter integrated.

	BU60050W	White
	BU60050A	Anodised aluminium
	BU60050B	Black
	BU60050P	Polished aluminium



CERTIFICATIONS

