

BELVEDERE CLOVE I DALI

Beam angle	100°
Mounting	Ground
Lamps description	Power LED: 8,4W - 816 lm ≠ FIXT 657 lm - 3000K/CRI 80 - 100-240V
Environment	Outdoor
Notes	We recommend using a connection system with a degree of protection greater than or equal to the degree of protection of the luminaire.
Technical description	Family of outdoor products consisting of luminaires with a pole of two different heights and suitable for floor installations (ground or buried) and with integrated power supply box.



Belvedere Clove I Dali

designed by Antonio Citterio with Toan Nguyen

100/240V power supply included. Ready for installation on rigid base. Box for ground installation to be ordered separately. Included 2 way terminal block 3 phases IP68 (7-12 mm cable).

ELECTRICAL


Transformer type	Electronic dimmable dali
Transformer availability	Included
Transformer mounting	Integral
Emergency	Without
Voltage (V)	110/240

PHYSICAL


Aiming	Fixed
Weight (kg)	1,70
Number of heads	1

- F001A31D001 White
- F001A31D006 Grey
- F001A31D033 Anthracite
- F001A31D030 Black
- F001A31D018 Deep brown

DIMENSIONS

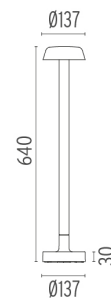

CERTIFICATIONS

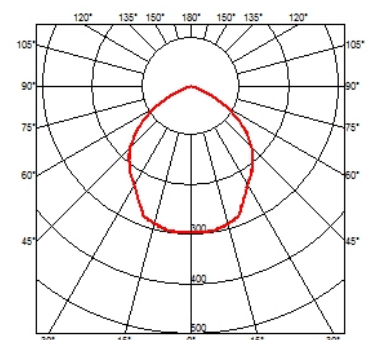

Belvedere Clove I Dali .Accessories


Mounting



○ F001Z020000

Box for ground installation

Electrical

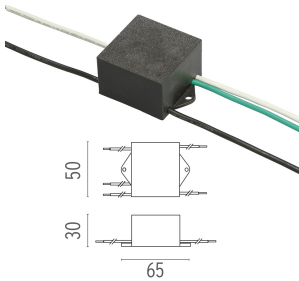

○ F990E00A000

Surge protection device

Surge protection device.
275Vac. Maximum discharge current 10KA (8/20us).
Maximum operating current 5A. Suitable for series connection. IP66.




Belvedere Clove I Dali

designed by Antonio Citterio with Toan Nguyen


100/240V power supply included. Ready for installation on rigid base. Box for ground installation to be ordered separately. Included 2 way terminal block 3 phases IP68 (7-12 mm cable).

- F001A31D001 White
- F001A31D006 Grey
- F001A31D033 Anthracite
- F001A31D030 Black
- F001A31D018 Deep brown

DIMENSIONS

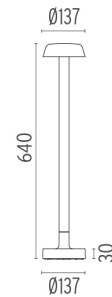

CERTIFICATIONS

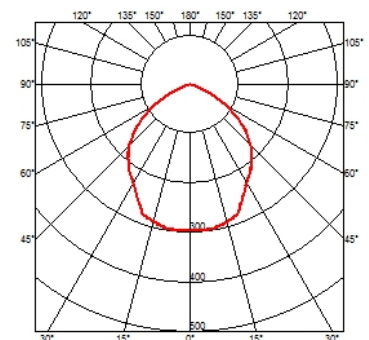

Belvedere Clove I Dali . Lamps



Power LED

Lamp category:

LED

Socket:

Special base

Lamp type:

Power LED




Belvedere Clove I Dali

designed by Antonio Citterio with Toan Nguyen

100/240V power supply included. Ready for installation on rigid base. Box for ground installation to be ordered separately. Included 2 way terminal block 3 phases IP68 (7-12 mm cable).

- F001A31D001 White
- F001A31D006 Grey
- F001A31D033 Anthracite
- F001A31D030 Black
- F001A31D018 Deep brown

DIMENSIONS

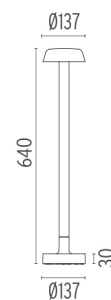

CERTIFICATIONS

