

BELVEDERE CLOVE 2 DALI

Beam angle	100°
Mounting	Ground
Lamps description	Power LED: 8,4W - 873 lm ≠ FIXT 703 lm - 4000K/CRI 80 - 100-240V
Environment	Outdoor
Notes	We recommend using a connection system with a degree of protection greater than or equal to the degree of protection of the luminaire.
Technical description	Family of outdoor products consisting of luminaires with a pole of two different heights and suitable for floor installations (ground or buried) and with integrated power supply box.

ELECTRICAL

Transformer type	Electronic dimmable dali
Transformer availability	Included
Transformer mounting	Integral
Emergency	Without
Voltage (V)	110/240

PHYSICAL

Aiming	Fixed
Weight (kg)	1,70
Number of heads	1




Belvedere Clove 2 Dali

designed by Antonio Citterio with Toan Nguyen


100/240V power supply included. Ready for installation on rigid base. Box for ground installation to be ordered separately. Included 2 way terminal block 3 phases IP68 (7-12 mm cable).

- F001B41D001 White
- F001B41D006 Grey
- F001B41D033 Anthracite
- F001B41D030 Black
- F001B41D018 Deep brown

DIMENSIONS



CERTIFICATIONS

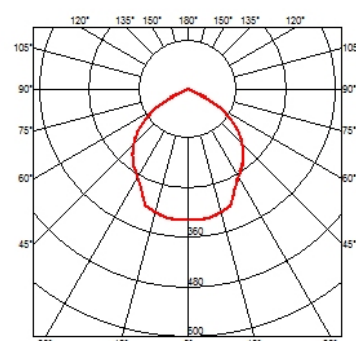

Belvedere Clove 2 Dali .Accessories


Mounting



○ F001Z020000

Box for ground installation

Electrical



○ F990E00A000

Surge protection device

Surge protection device.
275Vac. Maximum discharge
current 10KA (8/20us).
Maximum operating current
5A. Suitable for series
connection. IP66.




Belvedere Clove 2 Dali

designed by Antonio Citterio with
Toan Nguyen


100/240V power supply included.
Ready for installation on rigid base.
Box for ground installation to be
ordered separately. Included 2 way
terminal block 3 phases IP68 (7-12
mm cable).

- F001B41D001 White
- F001B41D006 Grey
- F001B41D033 Anthracite
- F001B41D030 Black
- F001B41D018 Deep brown

DIMENSIONS



CERTIFICATIONS

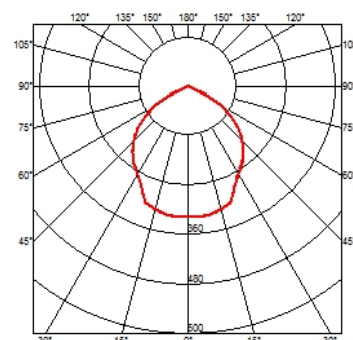

Belvedere Clove 2 Dali . Lamps



Power LED

Lamp category:
LED

Socket:
Special base

Lamp type:
Power LED




Belvedere Clove 2 Dali

designed by Antonio Citterio with
Toan Nguyen

100/240V power supply included.
Ready for installation on rigid base.
Box for ground installation to be
ordered separately. Included 2 way
terminal block 3 phases IP68 (7-12
mm cable).

- F001B41D001 White
- F001B41D006 Grey
- F001B41D033 Anthracite
- F001B41D030 Black
- F001B41D018 Deep brown

DIMENSIONS



CERTIFICATIONS

