

BELVEDERE SPOT F3 DIMMABLE I-10V

Beam angle	16° Medium
Mounting	Ground
Lamps description	Power LED: 6W - 513 lm ≠ FIXT 380 lm - 2700K/CRI 80 - 100-240V
Environment	Outdoor
Notes	We recommend using a connection system with a degree of protection greater than or equal to the degree of protection of the luminaire.
Technical description	Family of adjustable outdoor LED lighting luminaires (double rotation, vertical and horizontal axle) suitable for floor installations (ground or buried) and with integrated power supply box.



Belvedere Spot F3 Dimmable I-10V

designed by Antonio Citterio with Toan Nguyen

100/240V power supply included. Ready for installation on rigid base. Box for ground installation to be ordered separately. Included 2 way terminal block 3 phases IP68 (7-12 mm cable).

ELECTRICAL


Transformer type	Electronic dimmable I-10V
Transformer availability	Included
Transformer mounting	Integral
Emergency	Without
Voltage (V)	100/240

- F001E22B001 White
- F001E22B006 Grey
- F001E22B033 Anthracite
- F001E22B030 Black
- F001E22B018 Deep brown


PHYSICAL

Aiming	Adjustable
Weight (kg)	2,10
Number of heads	1

DIMENSIONS



CERTIFICATIONS

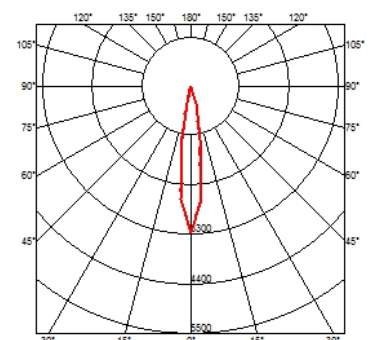

Belvedere Spot F3 Dimmable I-10V .Accessories

Optical



F001Z010000

Spot visor



F001Z030000

Spot visor with
honeycomb



F001Z040000

Spot visor with flood
lens



Belvedere Spot F3 Dimmable I-10V

designed by Antonio Citterio with
Toan Nguyen

100/240V power supply included.
Ready for installation on rigid base.
Box for ground installation to be
ordered separately. Included 2 way
terminal block 3 phases IP68 (7-12
mm cable).

- F001E22B001 White
- F001E22B006 Grey
- F001E22B033 Anthracite
- F001E22B030 Black
- F001E22B018 Deep brown


Mounting




F001Z020000

Box for ground
installation

DIMENSIONS




CERTIFICATIONS

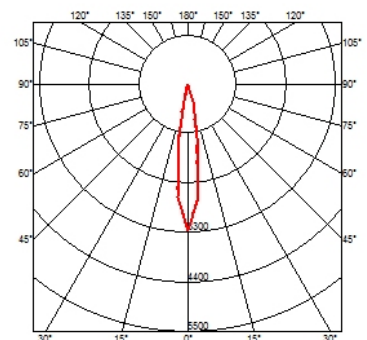

Belvedere Spot F3 Dimmable I-10V .Accessories

Electrical



○ F990E00A000

Surge protection device

Surge protection device.
275Vac. Maximum discharge current 10KA (8/20us).
Maximum operating current 5A. Suitable for series connection. IP66.

Belvedere Spot F3 Dimmable I-10V .Lamps



Power LED

Lamp category:

LED

Socket:

Special base

Lamp type:

Power LED




Belvedere Spot F3 Dimmable I-10V

designed by Antonio Citterio with Toan Nguyen

100/240V power supply included.
Ready for installation on rigid base.
Box for ground installation to be ordered separately. Included 2 way terminal block 3 phases IP68 (7-12 mm cable).

- F001E22B001 White
- F001E22B006 Grey
- F001E22B033 Anthracite
- F001E22B030 Black
- F001E22B018 Deep brown

DIMENSIONS



CERTIFICATIONS

