

BELVEDERE SPOT F3 DIMMABLE I-10V

| | |
|------------------------------|--|
| Beam angle | 16° Medium |
| Mounting | Ground |
| Lamps description | Power LED: 6W - 570 lm ≠ FIXT 423 lm - 4000K/CRI 80 - 100-240V |
| Environment | Outdoor |
| Notes | We recommend using a connection system with a degree of protection greater than or equal to the degree of protection of the luminaire. |
| Technical description | Family of adjustable outdoor LED lighting luminaires (double rotation, vertical and horizontal axle) suitable for floor installations (ground or buried) and with integrated power supply box. |

ELECTRICAL

| | |
|---------------------------------|---------------------------|
| Transformer type | Electronic dimmable I-10V |
| Transformer availability | Included |
| Transformer mounting | Integral |
| Emergency | Without |
| Voltage (V) | 100/240 |

PHYSICAL

| | |
|------------------------|------------|
| Aiming | Adjustable |
| Weight (kg) | 2,10 |
| Number of heads | 1 |




Belvedere Spot F3 Dimmable I-10V

designed by Antonio Citterio with Toan Nguyen


100/240V power supply included. Ready for installation on rigid base. Box for ground installation to be ordered separately. Included 2 way terminal block 3 phases IP68 (7-12 mm cable).

- F001E42B001 White
- F001E42B006 Grey
- F001E42B033 Anthracite
- F001E42B030 Black
- F001E42B018 Deep brown

DIMENSIONS



CERTIFICATIONS

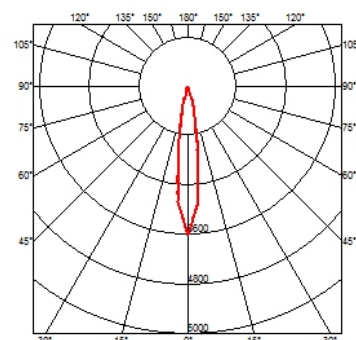

Belvedere Spot F3 Dimmable I-10V .Accessories

Optical



F001Z010000

Spot visor



F001Z030000

Spot visor with honeycomb



F001Z040000

Spot visor with flood lens




Belvedere Spot F3 Dimmable I-10V

designed by Antonio Citterio with Toan Nguyen

100/240V power supply included. Ready for installation on rigid base. Box for ground installation to be ordered separately. Included 2 way terminal block 3 phases IP68 (7-12 mm cable).

- F001E42B001 White
- F001E42B006 Grey
- F001E42B033 Anthracite
- F001E42B030 Black
- F001E42B018 Deep brown

DIMENSIONS



CERTIFICATIONS




Mounting




F001Z020000

Box for ground installation

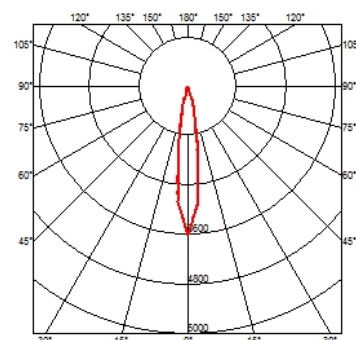

Belvedere Spot F3 Dimmable I-10V .Accessories

Electrical

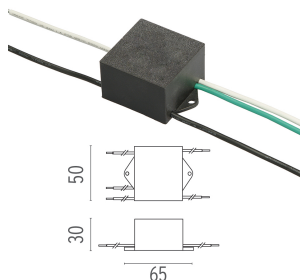

F990E00A000

Surge protection device

Surge protection device.
275Vac. Maximum discharge
current 10KA (8/20us).
Maximum operating current
5A. Suitable for series
connection. IP66.

Belvedere Spot F3 Dimmable I-10V .Lamps



Power LED

Lamp category:

LED

Socket:

Special base

Lamp type:

Power LED




Belvedere Spot F3 Dimmable I-10V

designed by Antonio Citterio with
Toan Nguyen

100/240V power supply included.
Ready for installation on rigid base.
Box for ground installation to be
ordered separately. Included 2 way
terminal block 3 phases IP68 (7-12
mm cable).

- F001E42B001 White
- F001E42B006 Grey
- F001E42B033 Anthracite
- F001E42B030 Black
- F001E42B018 Deep brown

DIMENSIONS



CERTIFICATIONS

