

BELVEDERE SPOT PICK

Beam angle	10° Spot
Mounting	Ground spike
Lamps description	Power LED: 6W - 530 lm ≠ FIXT 440 lm - 3000K/CRI 80 - 100-240V
Environment	Outdoor
Notes	We recommend using a connection system with a degree of protection greater than or equal to the degree of protection of the luminaire.
Technical description	Family of adjustable outdoor LED lighting luminaires (double rotation, vertical and horizontal axle) suitable for floor installations (ground or buried) and with integrated power supply box.




Belvedere Spot Pick

designed by Antonio Citterio with Toan Nguyen


100/240V power supply included. Included 2 way terminal block 3 phases IP68 (7-12 mm cable). 24V Dimmable version available on request.

- F001F31A001 White
- F001F31A006 Grey
- F001F31A033 Anthracite
- F001F31A030 Black
- F001F31A018 Deep brown

DIMENSIONS




CERTIFICATIONS

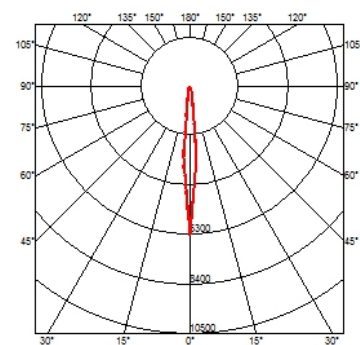

PHYSICAL

Aiming	Adjustable
Weight (kg)	1,05
Number of heads	1

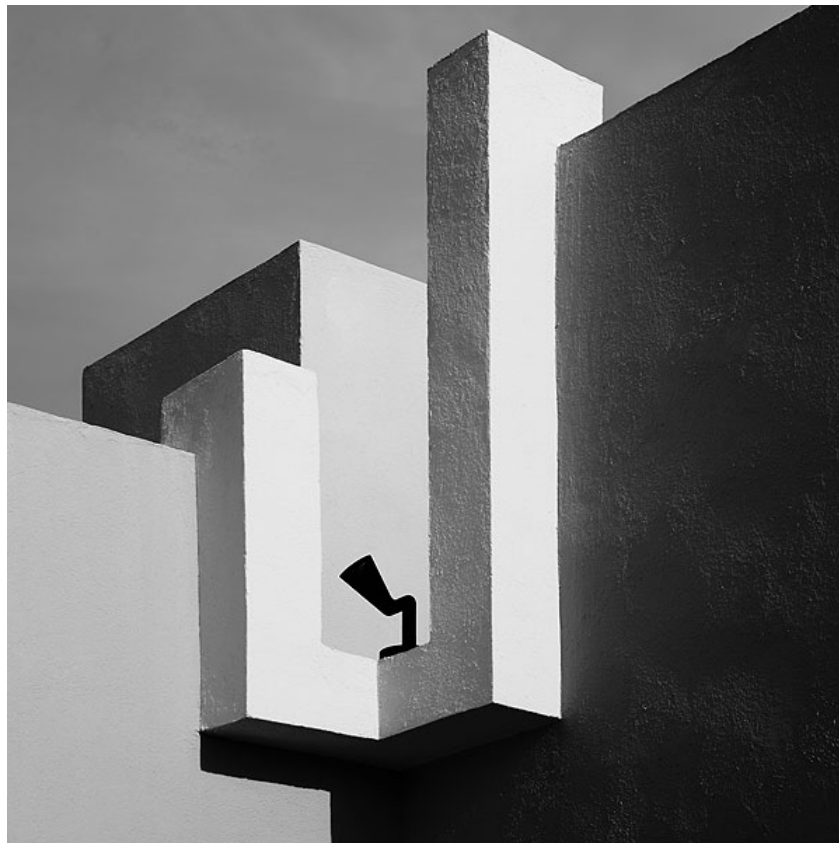

Belvedere Spot Pick .Accessories

Optical



○ F001Z010000

Spot visor



○ F001Z030000

Spot visor with honeycomb



○ F001Z040000

Spot visor with flood lens




Belvedere Spot Pick

designed by Antonio Citterio with Toan Nguyen

100/240V power supply included. Included 2 way terminal block 3 phases IP68 (7-12 mm cable). 24V Dimmable version available on request.

- F001F31A001 White
- F001F31A006 Grey
- F001F31A033 Anthracite
- F001F31A030 Black
- F001F31A018 Deep brown

DIMENSIONS




Mounting



○ F001Z020000


Box for ground installation

CERTIFICATIONS

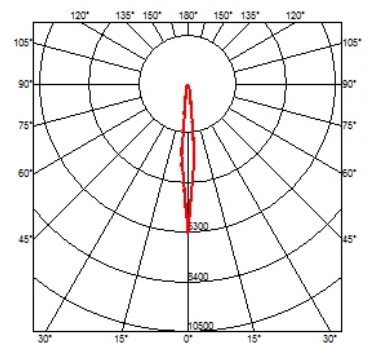

Belvedere Spot Pick . Accessories

Electrical



F990E00A000

Surge protection device

Surge protection device.
275Vac. Maximum discharge current 10KA (8/20us).
Maximum operating current 5A. Suitable for series connection. IP66.

Belvedere Spot Pick . Lamps



Power LED

Lamp category:

LED

Socket:

Special base

Lamp type:

Power LED




Belvedere Spot Pick

designed by Antonio Citterio with Toan Nguyen

100/240V power supply included.
Included 2 way terminal block 3 phases IP68 (7-12 mm cable). 24V Dimmable version available on request.

- F001F31A001 White
- F001F31A006 Grey
- F001F31A033 Anthracite
- F001F31A030 Black
- F001F31A018 Deep brown

DIMENSIONS



CERTIFICATIONS

