

BELVEDERE SPOT PICK

| | |
|------------------------------|--|
| Beam angle | 16° Medium |
| Mounting | Ground spike |
| Lamps description | Power LED: 6W - 570 lm ≠ FIXT 423 lm - 4000K/CRI 80 - 100-240V |
| Environment | Outdoor |
| Notes | We recommend using a connection system with a degree of protection greater than or equal to the degree of protection of the luminaire. |
| Technical description | Family of adjustable outdoor LED lighting luminaires (double rotation, vertical and horizontal axle) suitable for floor installations (ground or buried) and with integrated power supply box. |



Belvedere Spot Pick

designed by Antonio Citterio with Toan Nguyen

ELECTRICAL

| | |
|---------------------------------|------------|
| Transformer type | Electronic |
| Transformer availability | Included |
| Transformer mounting | Integral |
| Emergency | Without |
| Voltage (V) | 100/240 |


100/240V power supply included.
Included 2 way terminal block 3 phases
IP68 (7-12 mm cable). 24V Dimmable
version available on request.

PHYSICAL



| | |
|------------------------|------------|
| Aiming | Adjustable |
| Weight (kg) | 1,05 |
| Number of heads | 1 |

- F001F42A001 White
- F001F42A006 Grey
- F001F42A033 Anthracite
- F001F42A030 Black
- F001F42A018 Deep brown

DIMENSIONS



CERTIFICATIONS

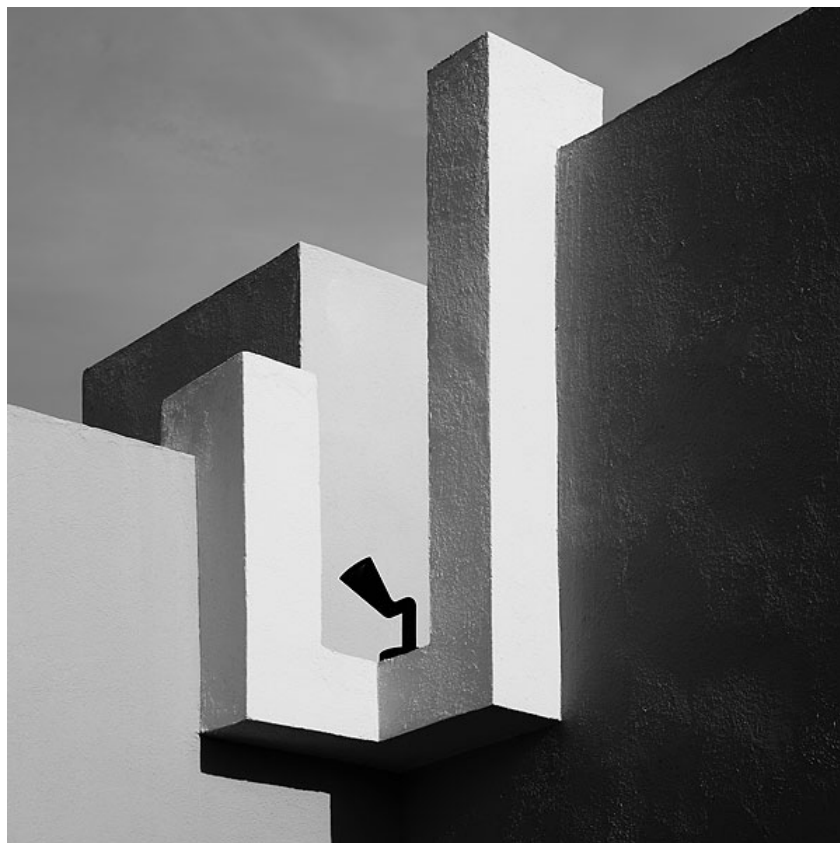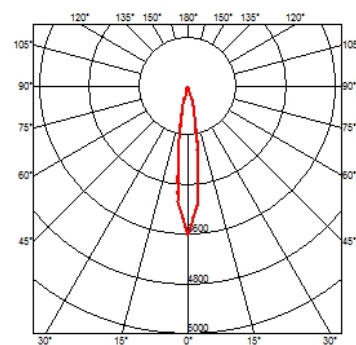

Belvedere Spot Pick .Accessories

Optical



☐ F001Z010000

Spot visor



☐ F001Z030000

Spot visor with honeycomb



☐ F001Z040000

Spot visor with flood lens




Belvedere Spot Pick

designed by Antonio Citterio with Toan Nguyen

100/240V power supply included.
Included 2 way terminal block 3 phases
IP68 (7-12 mm cable). 24V Dimmable
version available on request.

- ☐ F001F42A001 White
- ☐ F001F42A006 Grey
- ☐ F001F42A033 Anthracite
- ☐ F001F42A030 Black
- ☐ F001F42A018 Deep brown

DIMENSIONS




Mounting



☐ F001Z020000


Box for ground installation

CERTIFICATIONS

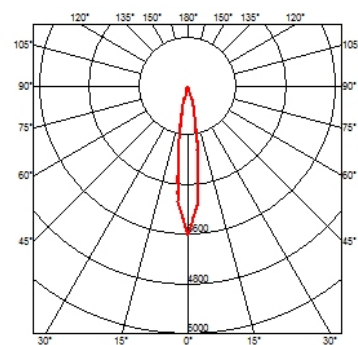

Belvedere Spot Pick .Accessories

Electrical

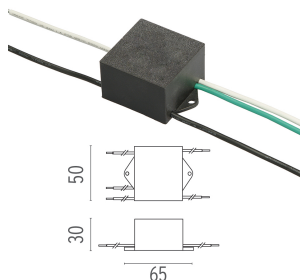

○ F990E00A000

Surge protection device

Surge protection device.
275Vac. Maximum discharge
current 10KA (8/20us).
Maximum operating current
5A. Suitable for series
connection. IP66.

Belvedere Spot Pick . Lamps



Power LED

Lamp category:

LED

Socket:

Special base

Lamp type:

Power LED




Belvedere Spot Pick

designed by Antonio Citterio with
Toan Nguyen

100/240V power supply included.
Included 2 way terminal block 3 phases
IP68 (7-12 mm cable). 24V Dimmable
version available on request.

- F001F42A001 White
- F001F42A006 Grey
- F001F42A033 Anthracite
- F001F42A030 Black
- F001F42A018 Deep brown

DIMENSIONS



CERTIFICATIONS

