

## BELVEDERE SPOT WALL

|                              |  |
|------------------------------|--|
| <b>Beam angle</b>            | 16° Medium   |
| <b>Mounting</b>              | Wall surface   |
| <b>Lamps description</b>     | Power Led: 6W - 513 lm ≠ FIXT 380 lm - 2700K/CRI 80 - 100-240V   |
| <b>Environment</b>           | Outdoor  |
| <b>Notes</b>                 | We recommend using a connection system with a degree of protection greater than or equal to the degree of protection of the luminaire.                                 |
| <b>Technical description</b> | Outdoor luminaire consisting of an adjustable projector for up to 350°±5° on the horizontal axle suitable for wall installations and with integrated power supply box. |



### Belvedere Spot Wall

designed by Antonio Citterio with Toan Nguyen

## ELECTRICAL

|                                 |            |
|---------------------------------|------------|
| <b>Transformer type</b>         | Electronic |
| <b>Transformer availability</b> | Included   |
| <b>Transformer mounting</b>     | Integral   |
| <b>Emergency</b>                | Without    |
| <b>Voltage (V)</b>              | 100/240    |



Direct wall attachment. 100/240V power supply included. Included 2 way terminal block 3 phases IP68 (7-12 mm cable). 24V Dimmable version available on request.

## PHYSICAL


|                        |            |
|------------------------|------------|
| <b>Aiming</b>          | Adjustable |
| <b>Weight (kg)</b>     | 0,90       |
| <b>Number of heads</b> | 1          |

- F001G22A001 White
- F001G22A006 Grey
- F001G22A033 Anthracite
- F001G22A030 Black
- F001G22A018 Deep brown

## DIMENSIONS

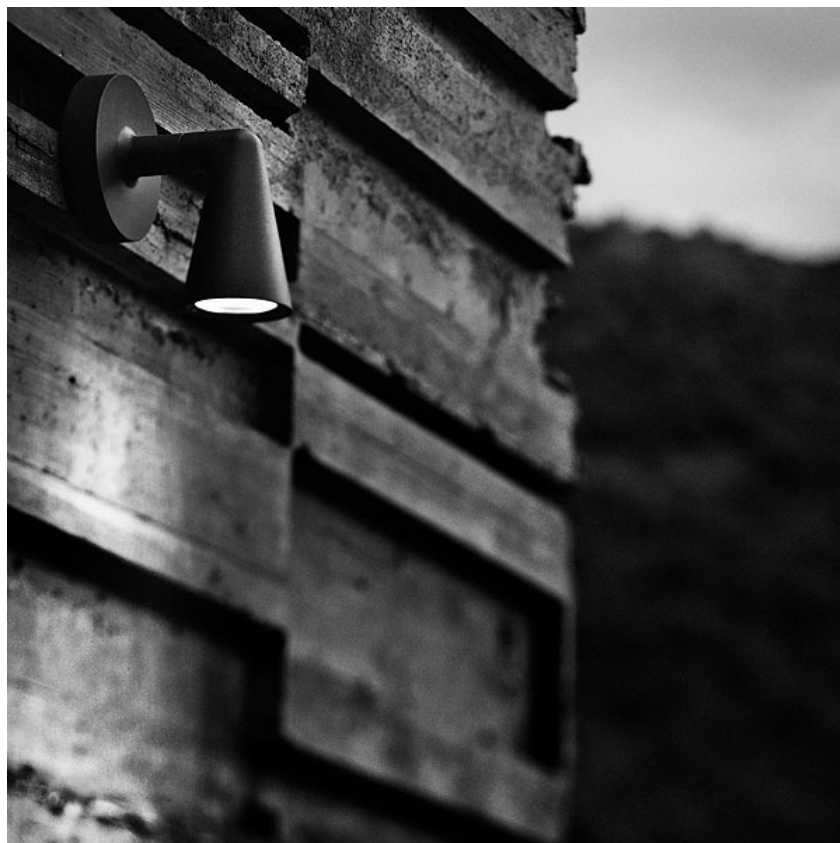

## CERTIFICATIONS

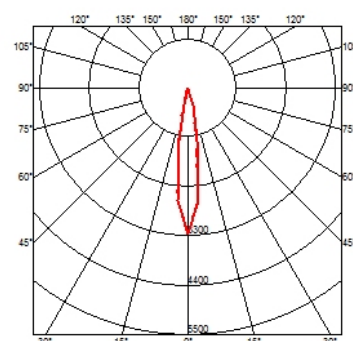

## Belvedere Spot Wall .Accessories

### Optical



F001Z010000

**Spot visor**



F001Z030000

**Spot visor with honeycomb**



F001Z040000

**Spot visor with flood lens**




### Belvedere Spot Wall

designed by Antonio Citterio with Toan Nguyen

Direct wall attachment. 100/240V power supply included. Included 2 way terminal block 3 phases IP68 (7-12 mm cable). 24V Dimmable version available on request.

- F001G22A001 White
- F001G22A006 Grey
- F001G22A033 Anthracite
- F001G22A030 Black
- F001G22A018 Deep brown

### DIMENSIONS




### Mounting



F001Z020000

**Box for ground installation**

### CERTIFICATIONS

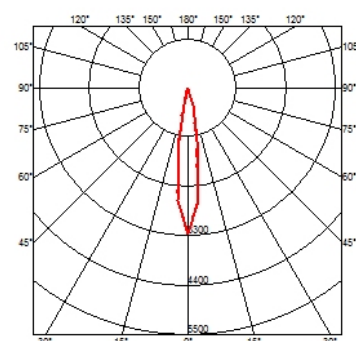

## Belvedere Spot Wall .Accessories

### Electrical



○ F990E00A000

### Surge protection device

Surge protection device.  
275Vac. Maximum discharge  
current 10KA (8/20us).  
Maximum operating current  
5A. Suitable for series  
connection. IP66.

## Belvedere Spot Wall . Lamps



### Power LED

### Lamp category:

LED

### Socket:

Special base

### Lamp type:

Power LED




## Belvedere Spot Wall

designed by Antonio Citterio with  
Toan Nguyen

Direct wall attachment. 100/240V  
power supply included. Included 2  
way terminal block 3 phases IP68  
(7-12 mm cable). 24V Dimmable  
version available on request.

- F001G22A001 White
- F001G22A006 Grey
- F001G22A033 Anthracite
- F001G22A030 Black
- F001G22A018 Deep brown

## DIMENSIONS



## CERTIFICATIONS

