

BELVEDERE SPOT WALL

Beam angle	16° Medium
Mounting	Wall surface
Lamps description	Power Led: 6W - 570 lm ≠ FIXT 423 lm - 4000K/CRI 80 - 100-240V
Environment	Outdoor
Notes	We recommend using a connection system with a degree of protection greater than or equal to the degree of protection of the luminaire.
Technical description	Outdoor luminaire consisting of an adjustable projector for up to 350°±5° on the horizontal axle suitable for wall installations and with integrated power supply box.



Belvedere Spot Wall

designed by Antonio Citterio with Toan Nguyen

ELECTRICAL

Transformer type	Electronic
Transformer availability	Included
Transformer mounting	Integral
Emergency	Without
Voltage (V)	100/240



Direct wall attachment. 100/240V power supply included. Included 2 way terminal block 3 phases IP68 (7-12 mm cable). 24V Dimmable version available on request.

PHYSICAL


Aiming	Adjustable
Weight (kg)	0,90
Number of heads	1

- F001G42A001 White
- F001G42A006 Grey
- F001G42A033 Anthracite
- F001G42A030 Black
- F001G42A018 Deep brown

DIMENSIONS

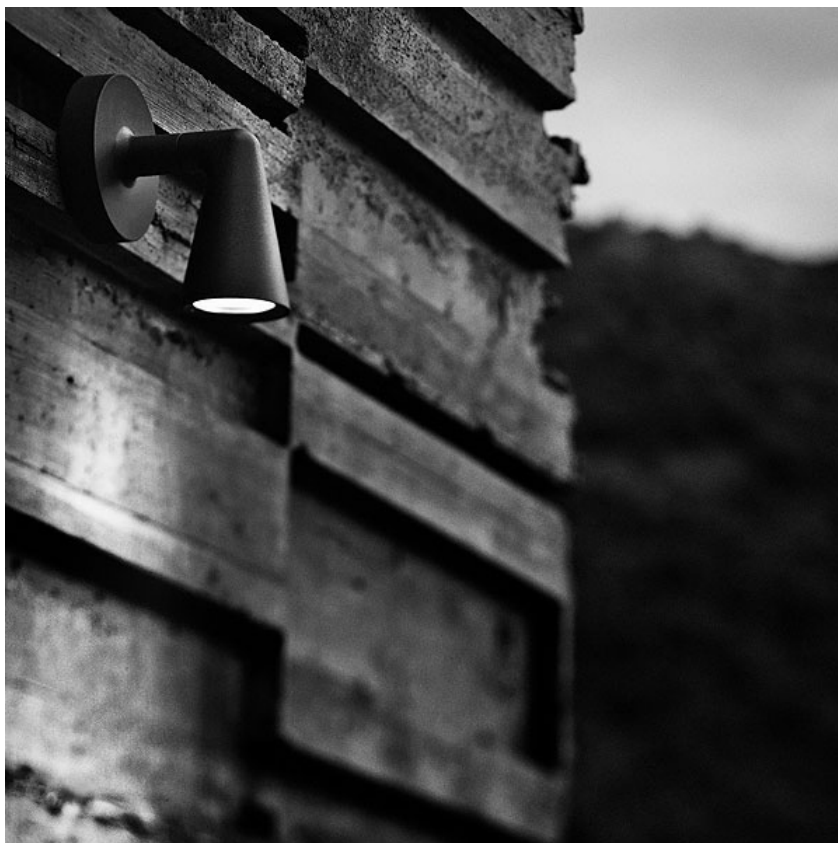

CERTIFICATIONS

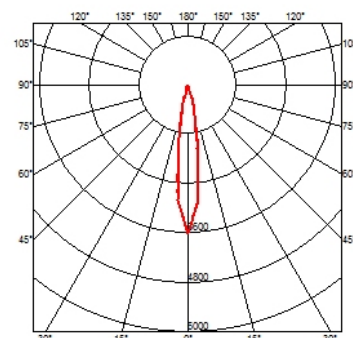

Belvedere Spot Wall .Accessories

Optical



○ F001Z010000

Spot visor



○ F001Z030000

Spot visor with honeycomb



○ F001Z040000

Spot visor with flood lens




Belvedere Spot Wall

designed by Antonio Citterio with Toan Nguyen

Direct wall attachment. 100/240V power supply included. Included 2 way terminal block 3 phases IP68 (7-12 mm cable). 24V Dimmable version available on request.

- F001G42A001 White
- F001G42A006 Grey
- F001G42A033 Anthracite
- F001G42A030 Black
- F001G42A018 Deep brown

DIMENSIONS




Mounting



○ F001Z020000

Box for ground installation

CERTIFICATIONS

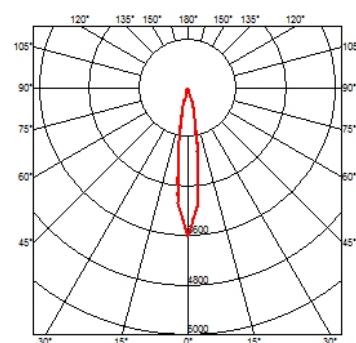

Belvedere Spot Wall .Accessories

Electrical



○ F990E00A000

Surge protection device

Surge protection device.
275Vac. Maximum discharge
current 10kA (8/20us).
Maximum operating current
5A. Suitable for series
connection. IP66.

Belvedere Spot Wall . Lamps



Power LED

Lamp category:

LED

Socket:

Special base

Lamp type:

Power LED




Belvedere Spot Wall

designed by Antonio Citterio with
Toan Nguyen

Direct wall attachment. 100/240V
power supply included. Included 2
way terminal block 3 phases IP68
(7-12 mm cable). 24V Dimmable
version available on request.

- F00IG42A001 White
- F00IG42A006 Grey
- F00IG42A033 Anthracite
- F00IG42A030 Black
- F00IG42A018 Deep brown

DIMENSIONS



CERTIFICATIONS

