

## BELVEDERE SPOT WALL

<b>Beam angle</b>	28° Flood
<b>Mounting</b>	Wall surface
<b>Lamps description</b>	Power Led: 6W - 570 lm ≠ FIXT 390 lm - 4000K/CRI 80 - 100-240V
<b>Environment</b>	Outdoor
<b>Notes</b>	We recommend using a connection system with a degree of protection greater than or equal to the degree of protection of the luminaire.
<b>Technical description</b>	Outdoor luminaire consisting of an adjustable projector for up to 350°±5° on the horizontal axle suitable for wall installations and with integrated power supply box.



### Belvedere Spot Wall

designed by Antonio Citterio with Toan Nguyen

## ELECTRICAL

<b>Transformer type</b>	Electronic
<b>Transformer availability</b>	Included
<b>Transformer mounting</b>	Integral
<b>Emergency</b>	Without
<b>Voltage (V)</b>	100/240


Direct wall attachment. 100/240V power supply included. Included 2 way terminal block 3 phases IP68 (7-12 mm cable). 24V Dimmable version available on request.

## PHYSICAL



<b>Aiming</b>	Adjustable
<b>Weight (kg)</b>	0,90
<b>Number of heads</b>	1

- F001G43A001 White
- F001G43A006 Grey
- F001G43A033 Anthracite
- F001G43A030 Black
- F001G43A018 Deep brown

## DIMENSIONS



## CERTIFICATIONS

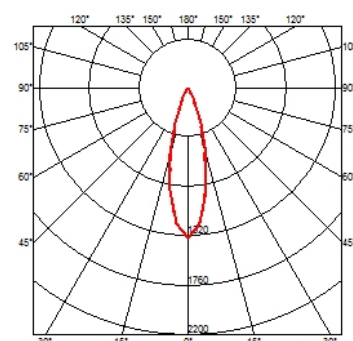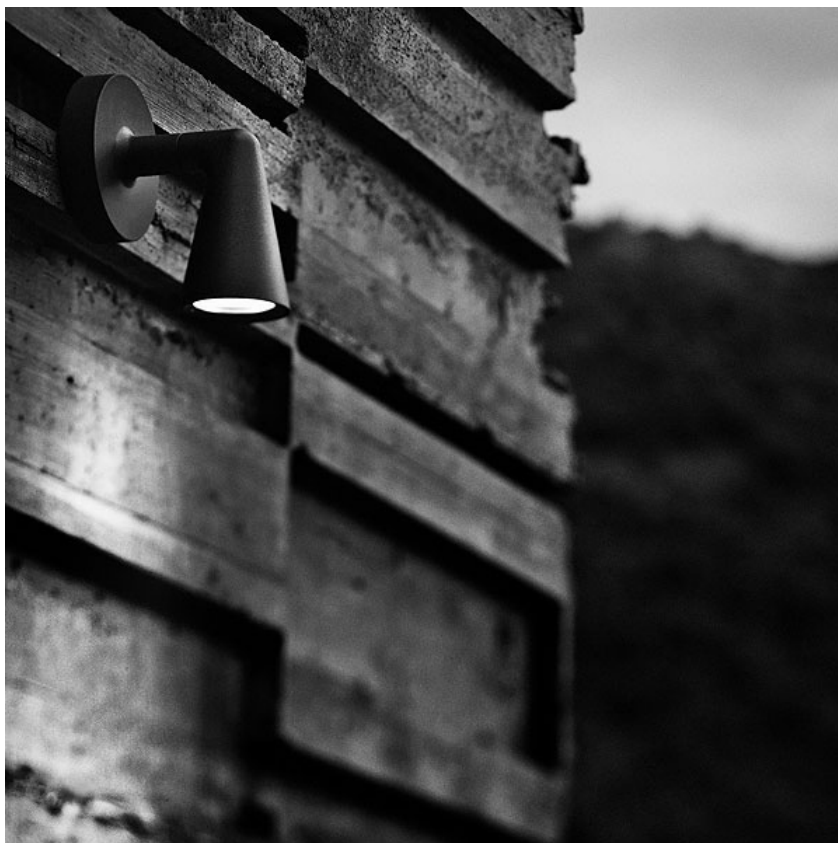

## Belvedere Spot Wall .Accessories

### Optical



F001Z010000

**Spot visor**



F001Z030000

**Spot visor with honeycomb**



F001Z040000

**Spot visor with flood lens**




### Belvedere Spot Wall

designed by Antonio Citterio with Toan Nguyen

Direct wall attachment. 100/240V power supply included. Included 2 way terminal block 3 phases IP68 (7-12 mm cable). 24V Dimmable version available on request.

- F001G43A001 White
- F001G43A006 Grey
- F001G43A033 Anthracite
- F001G43A030 Black
- F001G43A018 Deep brown

### DIMENSIONS




### Mounting



F001Z020000

**Box for ground installation**

### CERTIFICATIONS

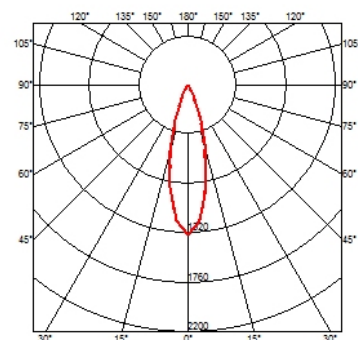

## Belvedere Spot Wall .Accessories

### Electrical



○ F990E00A000

### Surge protection device

Surge protection device.  
275Vac. Maximum discharge  
current 10KA (8/20us).  
Maximum operating current  
5A. Suitable for series  
connection. IP66.

## Belvedere Spot Wall . Lamps



### Power LED

### Lamp category:

LED

### Socket:

Special base

### Lamp type:

Power LED




## Belvedere Spot Wall

designed by Antonio Citterio with  
Toan Nguyen

Direct wall attachment. 100/240V  
power supply included. Included 2  
way terminal block 3 phases IP68  
(7-12 mm cable). 24V Dimmable  
version available on request.

- F001G43A001 White
- F001G43A006 Grey
- F001G43A033 Anthracite
- F001G43A030 Black
- F001G43A018 Deep brown

### DIMENSIONS



### CERTIFICATIONS

