

## KLEIN PRO H 600 MM DIMMABLE I-10V

Beam angle	45°
Mounting	Ground, Floor
Lamps description	Power LED: 11W - 1089 lm ≠ FIXT 294 lm - 2700K/CRI 80 - 220-240V
Environment	Outdoor
Technical description	

<span>The body of Klein Pro bollard is made of extruded aluminium, base and diffuser in die-cast aluminium EN AB-47100 with a low copper content. High-resistance coating: the external coating is applied with a double layer with epoxy powders according to the QUALICOAT standard. The first layer of epoxy powder gives chemical and mechanical resistance, the second finishing layer of polyester powder ensures resistance. Also available in anodized finishes. Klein Pro is compatible with existing "Klein" fixing plate.</span>



### Klein Pro H 600 mm Dimmable I-10V

designed by FLOS Outdoor

220/240V power supply integrated. Solid surface or ground installation accessory to be ordered separately. Each luminaire is equipped with a segment of 1 m outgoing cable and a wiring kit.

## ELECTRICAL

Transformer type	Electronic dimmable I-10V
Transformer availability	Included
Transformer mounting	Integral
Emergency	Without
Voltage (V)	220/240

## PHYSICAL


IK rating	07
Aiming	Fixed
Weight (kg)	1,25
Number of heads	1

- F002A20B001 White
- F002A20B006 Grey
- F002A20B033 Anthracite
- F002A20B030 Black
- F002A20B018 Deep brown
- F002A21B070 Óxido natural
- F002A21B071 Óxido negro

## DIMENSIONS



## CERTIFICATIONS

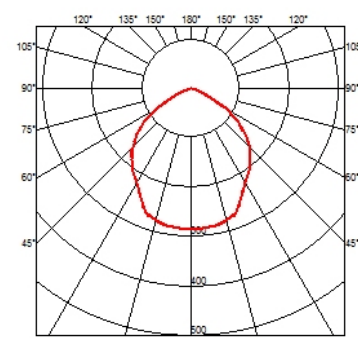

## Klein Pro H 600 mm Dimmable I-I0V .Accessories

### Mounting



○ F002Z030000

**Minimal Klein Pro ground fixation plate, 47x57xH160 mm**  
Klein Pro is also compatible with existing Klein ground fixing plates 85x85xH160 mm, available on request.

○ F002Z010001

● F002Z010006

● F002Z010033

● F002Z010030

● F002Z010018

**Fixing base for solid surfaces**



### Klein Pro H 600 mm Dimmable I-I0V

designed by FLOS Outdoor

220/240V power supply integrated. Solid surface or ground installation accessory to be ordered separately. Each luminaire is equipped with a segment of 1 m outgoing cable and a wiring kit.

○ F002A20B001 White

● F002A20B006 Grey

● F002A20B033 Anthracite

● F002A20B030 Black

● F002A20B018 Deep brown

● F002A21B070 Óxido natural

● F002A21B071 Óxido negro

### DIMENSIONS



### Decorative




● F002Z040070

● F002Z040071

● F002Z040073

**Anodized aestetcal pole screen**

### CERTIFICATIONS

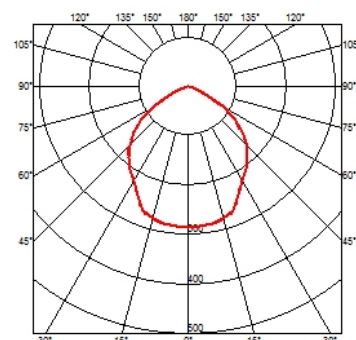

## Klein Pro H 600 mm Dimmable I-10V .Accessories

### Electrical



○ F990E00A000

### Surge protection device

Surge protection device.  
275Vac. Maximum discharge  
current 10kA (8/20us).  
Maximum operating current  
5A. Suitable for series  
connection. IP66.

## Klein Pro H 600 mm Dimmable I-10V .Lamps



### Power LED

### Lamp category:

LED

### Socket:

Special base

### Lamp type:

Power LED



## Klein Pro H 600 mm Dimmable I-10V

designed by FLOS Outdoor

220/240V power supply integrated.  
Solid surface or ground installation  
accessory to be ordered separately.  
Each luminaire is equipped with a  
segment of 1 m outgoing cable and a  
wiring kit.

- F002A20B001 White
- F002A20B006 Grey
- F002A20B033 Anthracite
- F002A20B030 Black
- F002A20B018 Deep brown
- F002A21B070 Óxido natural
- F002A21B071 Óxido negro

### DIMENSIONS



### CERTIFICATIONS

