

#### **KLEIN PRO H 600 MM DALI**

Beam angle 45°

Mounting Ground, Floor

**Lamps description** Power LED: 11W - 1089 lm ≠ FIXT 294 lm - 2700K/CRI 80 - 220-240V

**Environment** Outdoor

**Technical description** <span>The body of Klein Pro bollard is made of extruded

aluminium, base and diffuser in die-cast aluminium EN AB-47100 with a low copper content. High-resistance coating: the external coating is applied with a double layer with epoxy powders according to the QUALICOAT standard. The first layer of epoxy powder gives chemical and mechanical resistance, the second finishing layer of polyester powder ensures resistance. Also available in anodized finishes. Klein Pro is compatible with existing "Klein" fixing plate.


#### **ELECTRICAL**

Transformer type Electronic dimmable dali

Transformer availability Included
Transformer mounting Integral
Emergency Without
Voltage (V) 220/240

#### **PHYSICAL**

IK rating 07
Aiming Fixed
Weight (kg) 1,25
Number of heads I

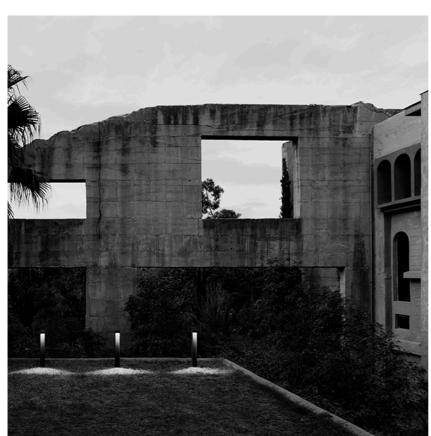

#### Klein Pro H 600 mm Dali

designed by FLOS Outdoor

220/240V power supply integrated. Solid surface or ground installation accessory to be ordered separately. Each luminaire is equipped with a segment of 1 m outgoing cable and a wiring kit.

F002A20D001 White

F002A20D006 Grey

F002A20D033 Anthracite

F002A20D030 Black

F002A20D018 Deep brown

F002A21D070 Óxido natural

F002A21D071 Óxido negro

### **DIMENSIONS**



#### **CERTIFICATIONS**








IP 66

1K 07





# Klein Pro H 600 mm Dali . Accessories

#### Mounting





F002Z030000

Minimal Klein Pro ground fixation plate, 47x57xH160 mm

mm Klein Pro is also compatible with existing Klein ground fixing plates 85x85xH160 mm, available on request. F002Z010001

F002Z010006

F002Z010033

F002Z010030

F002Z010018

Fixing base for solid surfaces

# Klein Pro H 600 mm Dali

designed by FLOS Outdoor

220/240V power supply integrated. Solid surface or ground installation accessory to be ordered separately. Each luminaire is equipped with a segment of I m outgoing cable and a wiring kit.

F002A20D001 White

F002A20D006 Grey

F002A20D033 Anthracite

F002A20D030 Black

F002A20D018 Deep brown

F002A21D070 Óxido natural

F002A21D071 Óxido negro

# **DIMENSIONS**



#### **CERTIFICATIONS**










1K 07



Decorative

F002Z040070

F002Z04007I


F002Z040073

Anodized aestetical pole screen



# Klein Pro H 600 mm Dali . Accessories

#### **Electrical**



# F990E00A000

# Surge protection device

Surge protection device. 275Vac. Maximum discharge current 10KA (8/20us). Maximum operating current 5A. Suitable for series connection. IP66.

# Klein Pro H 600 mm Dali . Lamps



#### **Power LED**

Lamp category:

LED

Socket:

Special base

Lamp type:

Power LED



# Klein Pro H 600 mm Dali

designed by FLOS Outdoor

220/240V power supply integrated. Solid surface or ground installation accessory to be ordered separately. Each luminaire is equipped with a segment of I m outgoing cable and a wiring kit.

F002A20D001 White

F002A20D006 Grey

F002A20D033 Anthracite

F002A20D030 Black

F002A20D018 Deep brown

F002A21D070 Óxido natural

F002A21D071 Óxido negro

# **DIMENSIONS**



## **CERTIFICATIONS**









1K 07

