

KLEIN PRO H 600 MM

Beam angle 45°

Mounting Ground, Floor

Lamps description Power LED: 11W - 1126 lm ≠ FIXT 304 lm - 3000K/CRI 80 - 220-240V

Environment Outdoor

Technical description


aluminium, base and diffuser in die-cast aluminium EN AB-47100 with a low copper content. High-resistance coating: the external coating is applied with a double layer with epoxy powders according to the QUALICOAT standard. The first layer of epoxy powder gives chemical and mechanical resistance, the second finishing layer of polyester powder ensures resistance. Also available in anodized finishes. Klein Pro is compatible with existing "Klein" fixing plate.

ELECTRICAL

Transformer type Electronic
Transformer availability Included
Transformer mounting Integral
Emergency Without
Voltage (V) 220/240

PHYSICAL

IK rating 07
Aiming Fixed
Weight (kg) 1,25
Number of heads I

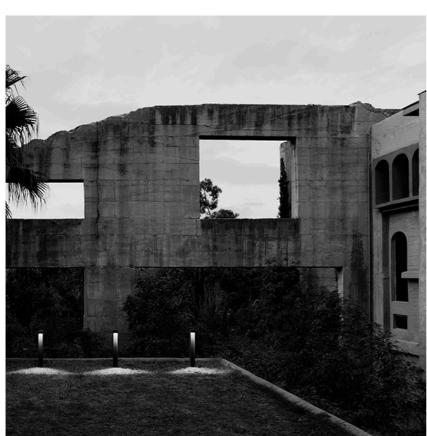

Klein Pro H 600 mm

designed by FLOS Outdoor

220/240V power supply integrated. Solid surface or ground installation accessory to be ordered separately. Each luminaire is equipped with a segment of 1 m outgoing cable and a wiring kit.

F002A30A001 White

F002A30A006 Grey

F002A30A033 Anthracite

F002A30A030 Black

F002A30A018 Deep brown

F002A31A070 Óxido natural

F002A31A071 Óxido negro

DIMENSIONS



CERTIFICATIONS








IP 66

1K 07





Klein Pro H 600 mm . Accessories

Mounting





F002Z030000

Minimal Klein Pro ground fixation plate, 47x57xH160 mm

mm Klein Pro is also compatible with existing Klein ground fixing plates 85x85xH160 mm, available on request. F002Z010001

F002Z010006

F002Z010033

F002Z010030

F002Z010018

Fixing base for solid surfaces

es

Klein Pro H 600 mm

designed by FLOS Outdoor

220/240V power supply integrated. Solid surface or ground installation accessory to be ordered separately. Each luminaire is equipped with a segment of I m outgoing cable and a wiring kit.

F002A30A001 White

F002A30A006 Grey

F002A30A033 Anthracite

F002A30A030 Black

F002A30A018 Deep brown

F002A31A070 Óxido natural

F002A31A071 Óxido negro

DIMENSIONS



CERTIFICATIONS










1K 07



Decorative



F002Z040070

F002Z040071


F002Z040073

Anodized aestetical pole screen



Klein Pro H 600 mm . Accessories

Electrical



F990E00A000

Surge protection device

Surge protection device. 275Vac. Maximum discharge current 10KA (8/20us). Maximum operating current 5A. Suitable for series connection. IP66.

Klein Pro H 600 mm . Lamps



Power LED

Lamp category:

LED

Socket:

Special base

Lamp type:

Power LED



Klein Pro H 600 mm

designed by FLOS Outdoor

220/240V power supply integrated. Solid surface or ground installation accessory to be ordered separately. Each luminaire is equipped with a segment of I m outgoing cable and a wiring kit.

F002A30A001 White

F002A30A006 Grey

F002A30A033 Anthracite

F002A30A030 Black

F002A30A018 Deep brown

F002A31A070 Óxido natural

F002A31A071 Óxido negro

DIMENSIONS



CERTIFICATIONS









1K 07

