

KLEIN PRO H 600 MM DIMMABLE I-10V

Beam angle 45°

Mounting Ground, Floor

Lamps description Power LED: 11W - 1126 lm ≠ FIXT 304 lm - 3000K/CRI 80 - 220-240V

Environment Outdoor

Technical description

aluminium, base and diffuser in die-cast aluminium EN AB-47100 with a low copper content. High-resistance coating: the external coating is applied with a double layer with epoxy powders according to the QUALICOAT standard. The first layer of epoxy powder gives chemical and mechanical resistance, the second finishing layer of polyester powder ensures resistance. Also available in anodized finishes. Klein Pro is compatible with existing "Klein" fixing plate.


ELECTRICAL

Transformer type Electronic dimmable 1-10V

Transformer availability Included
Transformer mounting Integral
Emergency Without
Voltage (V) 220/240

PHYSICAL

IK rating 07
Aiming Fixed
Weight (kg) 1,25
Number of heads I

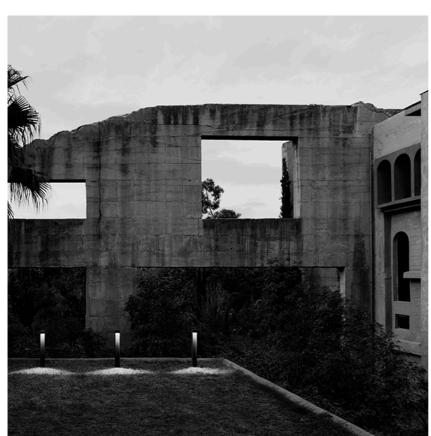

Klein Pro H 600 mm Dimmable I-10V

designed by FLOS Outdoor

220/240V power supply integrated. Solid surface or ground installation accessory to be ordered separately. Each luminaire is equipped with a segment of I m outgoing cable and a wiring kit.

F002A30B001 White F002A30B006 Grey

F002A30B008 Grey
F002A30B033 Anthracite

F002A30B030 Black

F002A30B018 Deep brown
F002A31B070 Óxido natural

F002A31B071 Óxido negro

DIMENSIONS



CERTIFICATIONS








IP 66

1K 07





Klein Pro H 600 mm Dimmable I-10V . Accessories

Mounting





F002Z030000

Minimal Klein Pro ground fixation plate, 47x57xH160 mm

mm Klein Pro is also compatible with existing Klein ground fixing plates 85x85xH160 mm, available on request. F002Z010001

F002Z010006

F002Z010033

F002Z010030

F002Z010018

Fixing base for solid surfaces

Klein Pro H 600 mm Dimmable I-I0V

designed by FLOS Outdoor

220/240V power supply integrated. Solid surface or ground installation accessory to be ordered separately. Each luminaire is equipped with a segment of I m outgoing cable and a wiring kit.

F002A30B001 White

F002A30B006 Grey

F002A30B033 Anthracite

F002A30B030 Black

F002A30B018 Deep brown

F002A31B070 Óxido natural

F002A31B071 Óxido negro

DIMENSIONS



CERTIFICATIONS










1K 07



Decorative



F002Z040070

F002Z040071


F002Z040073

Anodized aestetical pole screen



Klein Pro H 600 mm Dimmable I-10V . Accessories

Electrical



F990E00A000

Surge protection device

Surge protection device. 275Vac. Maximum discharge current 10KA (8/20us). Maximum operating current 5A. Suitable for series connection. IP66.

Klein Pro H 600 mm Dimmable I-I0V . Lamps



Power LED

Lamp category:

LED

Socket:

Special base

Lamp type:

Power LED



Klein Pro H 600 mm Dimmable I-I0V

designed by FLOS Outdoor

220/240V power supply integrated. Solid surface or ground installation accessory to be ordered separately. Each luminaire is equipped with a segment of I m outgoing cable and a wiring kit.

F002A30B001 White
F002A30B006 Grey
F002A30B033 Anthracite
F002A30B030 Black
F002A30B018 Deep brown
F002A31B070 Óxido natural
F002A31B071 Óxido negro

DIMENSIONS



CERTIFICATIONS











