

KLEIN PRO H 600 MM DALI

Beam angle	45°
Mounting	Ground, Floor
Lamps description	Power LED: 11W - 1126 lm ≠ FIXT 304 lm - 3000K/CRI 80 - 220-240V
Environment	Outdoor
Technical description	

The body of Klein Pro bollard is made of extruded aluminium, base and diffuser in die-cast aluminium EN AB-47100 with a low copper content. High-resistance coating: the external coating is applied with a double layer with epoxy powders according to the QUALICOAT standard. The first layer of epoxy powder gives chemical and mechanical resistance, the second finishing layer of polyester powder ensures resistance. Also available in anodized finishes. Klein Pro is compatible with existing "Klein" fixing plate.



Klein Pro H 600 mm Dali

designed by FLOS Outdoor

220/240V power supply integrated. Solid surface or ground installation accessory to be ordered separately. Each luminaire is equipped with a segment of 1 m outgoing cable and a wiring kit.

ELECTRICAL

Transformer type	Electronic dimmable dali
Transformer availability	Included
Transformer mounting	Integral
Emergency	Without
Voltage (V)	220/240

PHYSICAL


IK rating	07
Aiming	Fixed
Weight (kg)	1,25
Number of heads	1

- F002A30D001 White
- F002A30D006 Grey
- F002A30D033 Anthracite
- F002A30D030 Black
- F002A30D018 Deep brown
- F002A31D070 Óxido natural
- F002A31D071 Óxido negro

DIMENSIONS



CERTIFICATIONS

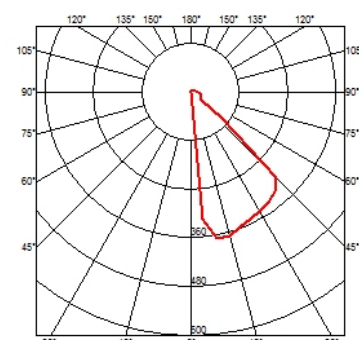

Klein Pro H 600 mm Dali .Accessories


Mounting





 F002Z030000


Minimal Klein Pro ground fixation plate, 47x57xH160 mm
Klein Pro is also compatible with existing Klein ground fixing plates 85x85xH160 mm, available on request.

 F002Z010001

 F002Z010006

 F002Z010033

 F002Z010030

 F002Z010018


Fixing base for solid surfaces




Klein Pro H 600 mm Dali


designed by FLOS Outdoor

220/240V power supply integrated. Solid surface or ground installation accessory to be ordered separately. Each luminaire is equipped with a segment of 1 m outgoing cable and a wiring kit.


 F002A30D001 White


 F002A30D006 Grey

 F002A30D033 Anthracite

 F002A30D030 Black

 F002A30D018 Deep brown

 F002A31D070 Óxido natural

 F002A31D071 Óxido negro


DIMENSIONS




Decorative



 F002Z040070

 F002Z040071

 F002Z040073

Anodized aesthetical pole screen

CERTIFICATIONS



Klein Pro H 600 mm Dali . Accessories

Electrical



○ F990E00A000

Surge protection device

Surge protection device.
275Vac. Maximum discharge
current 10kA (8/20us).
Maximum operating current
5A. Suitable for series
connection. IP66.

Klein Pro H 600 mm Dali . Lamps



Power LED

Lamp category:

LED

Socket:

Special base

Lamp type:

Power LED



Klein Pro H 600 mm Dali

designed by FLOS Outdoor

220/240V power supply integrated.
Solid surface or ground installation
accessory to be ordered separately.
Each luminaire is equipped with a
segment of 1 m outgoing cable and a
wiring kit.

- F002A30D001 White
- F002A30D006 Grey
- F002A30D033 Anthracite
- F002A30D030 Black
- F002A30D018 Deep brown
- F002A31D070 Óxido natural
- F002A31D071 Óxido negro

DIMENSIONS



CERTIFICATIONS

