

KLEIN PRO H 600 MM

Beam angle	45°
Mounting	Ground, Floor
Lamps description	Power LED: 11W - 1211 lm ≠ FIXT 325 lm - 4000K/CRI 80 - 220-240V
Environment	Outdoor
Technical description	The body of Klein Pro bollard is made of extruded aluminium, base and diffuser in die-cast aluminium EN AB-47100 with a low copper content. High-resistance coating: the external coating is applied with a double layer with epoxy powders according to the QUALICOAT standard. The first layer of epoxy powder gives chemical and mechanical resistance, the second finishing layer of polyester powder ensures resistance. Also available in anodized finishes. Klein Pro is compatible with existing "Klein" fixing plate.



Klein Pro H 600 mm

designed by FLOS Outdoor

220/240V power supply integrated. Solid surface or ground installation accessory to be ordered separately. Each luminaire is equipped with a segment of 1 m outgoing cable and a wiring kit.

ELECTRICAL

Transformer type	Electronic
Transformer availability	Included
Transformer mounting	Integral
Emergency	Without
Voltage (V)	220/240

PHYSICAL


IK rating	07
Aiming	Fixed
Weight (kg)	1,25
Number of heads	1

- F002A40A001 White
- F002A40A006 Grey
- F002A40A033 Anthracite
- F002A40A030 Black
- F002A40A018 Deep brown
- F002A41A070 Óxido natural
- F002A41A071 Óxido negro

DIMENSIONS



CERTIFICATIONS

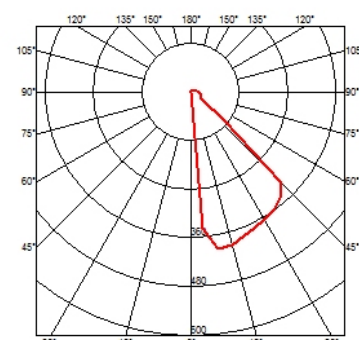

Klein Pro H 600 mm .Accessories

Mounting



F002Z030000

Minimal Klein Pro ground fixation plate, 47x57xH160 mm

Klein Pro is also compatible with existing Klein ground fixing plates 85x85xH160 mm, available on request.



F002Z010001



F002Z010006



F002Z010033



F002Z010030



F002Z010018

Fixing base for solid surfaces

Decorative



F002Z040070



F002Z040071



F002Z040073

Anodized aesthetical pole screen



Klein Pro H 600 mm

designed by FLOS Outdoor

220/240V power supply integrated. Solid surface or ground installation accessory to be ordered separately. Each luminaire is equipped with a segment of 1 m outgoing cable and a wiring kit.



F002A40A001 White



F002A40A006 Grey



F002A40A033 Anthracite



F002A40A030 Black



F002A40A018 Deep brown



F002A41A070 Óxido natural




F002A41A071 Óxido negro

DIMENSIONS




CERTIFICATIONS

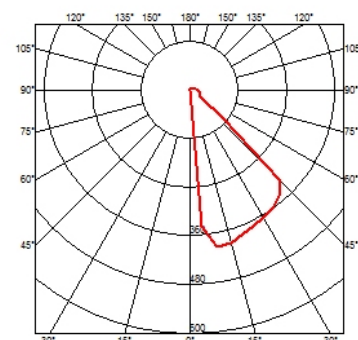

Klein Pro H 600 mm .Accessories

Electrical

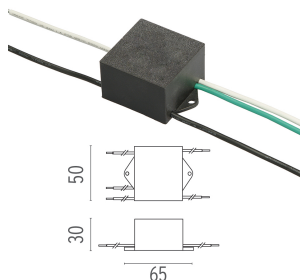

○ F990E00A000

Surge protection device

Surge protection device.
275Vac. Maximum discharge
current 10kA (8/20us).
Maximum operating current
5A. Suitable for series
connection. IP66.

Klein Pro H 600 mm .Lamps



Power LED

Lamp category:

LED

Socket:

Special base

Lamp type:

Power LED



Klein Pro H 600 mm

designed by FLOS Outdoor

220/240V power supply integrated.
Solid surface or ground installation
accessory to be ordered separately.
Each luminaire is equipped with a
segment of 1 m outgoing cable and a
wiring kit.

- F002A40A001 White
- F002A40A006 Grey
- F002A40A033 Anthracite
- F002A40A030 Black
- F002A40A018 Deep brown
- F002A41A070 Óxido natural
- F002A41A071 Óxido negro

DIMENSIONS



CERTIFICATIONS

