

#### KLEIN PRO H 600 MM DIMMABLE I-10V

Beam angle 45°

Mounting Ground, Floor

Lamps description Power LED: 11W - 1211 lm ≠ FIXT 325 lm - 4000K/CRI 80 - 220-240V

**Environment** Outdoor

**Technical description**

aluminium, base and diffuser in die-cast aluminium EN AB-47100 with a low copper content. High-resistance coating: the external coating is applied with a double layer with epoxy powders according to the QUALICOAT standard. The first layer of epoxy powder gives chemical and mechanical resistance, the second finishing layer of polyester powder ensures resistance. Also available in anodized finishes. Klein Pro is compatible with existing "Klein" fixing plate.


#### **ELECTRICAL**

Transformer type Electronic dimmable 1-10V

Transformer availability Included
Transformer mounting Integral
Emergency Without
Voltage (V) 220/240

## **PHYSICAL**

IK rating 07
Aiming Fixed
Weight (kg) 1,25
Number of heads I

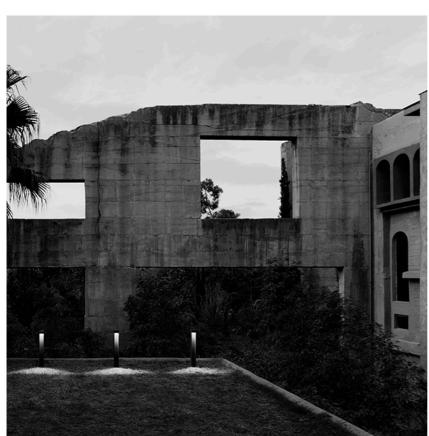

#### Klein Pro H 600 mm Dimmable I-10V

designed by FLOS Outdoor

220/240V power supply integrated. Solid surface or ground installation accessory to be ordered separately. Each luminaire is equipped with a segment of 1 m outgoing cable and a wiring kit.

F002A40B001 White

F002A40B006 Grey
F002A40B033 Anthracite

F002A40B030 Black

F002A40B018 Deep brown

F002A41B070 Óxido natural
F002A41B071 Óxido negro

## **DIMENSIONS**



## **CERTIFICATIONS**








ΙP

IK 07





# Klein Pro H 600 mm Dimmable I-10V . Accessories

## Mounting





F002Z030000

Minimal Klein Pro ground fixation plate, 47x57xH160 mm

mm Klein Pro is also compatible with existing Klein ground fixing plates 85x85xH160 mm, available on request. F002Z010001

F002Z010006

F002Z010033

F002Z010030

F002Z010018

Fixing base for solid surfaces

220/240V power supply integrated. Solid surface or ground installation accessory to be ordered separately. Each luminaire is equipped with a segment of I m outgoing cable and a wiring kit.

Klein Pro H 600 mm Dimmable I-I0V

designed by FLOS Outdoor

F002A40B001 White

F002A40B006 Grey

F002A40B033 Anthracite

F002A40B030 Black

**DIMENSIONS** 

F002A40B018 Deep brown

F002A41B070 Óxido natural

F002A41B071 Óxido negro



F002Z040070

F002Z040071

F002Z040073

Anodized aestetical pole screen



## **CERTIFICATIONS**








IP 66








# Klein Pro H 600 mm Dimmable I-10V . Accessories

#### **Electrical**



# F990E00A000

# Surge protection device

Surge protection device. 275Vac. Maximum discharge current 10KA (8/20us). Maximum operating current 5A. Suitable for series connection. IP66.

# Klein Pro H 600 mm Dimmable I-I0V . Lamps



#### **Power LED**

Lamp category:

LED

Socket:

Special base

Lamp type:

Power LED



## Klein Pro H 600 mm Dimmable I-I0V

# designed by FLOS Outdoor

220/240V power supply integrated. Solid surface or ground installation accessory to be ordered separately. Each luminaire is equipped with a segment of I m outgoing cable and a wiring kit.

F002A40B001 White
F002A40B006 Grey
F002A40B033 Anthracite
F002A40B030 Black
F002A40B018 Deep brown
F002A41B070 Óxido natural
F002A41B071 Óxido negro

# **DIMENSIONS**



## **CERTIFICATIONS**











