

## KLEIN PRO H 900 MM

<b>Beam angle</b>	45°
<b>Mounting</b>	Ground, Floor
<b>Lamps description</b>	Power LED: 11W - 1089 lm ≠ FIXT 292 lm - 2700K/CRI 80 - 220-240V
<b>Environment</b>	Outdoor

**Technical description**  
 The body of Klein Pro bollard is made of extruded aluminium, base and diffuser in die-cast aluminium EN AB-47100 with a low copper content. High-resistance coating: the external coating is applied with a double layer with epoxy powders according to the QUALICOAT standard. The first layer of epoxy powder gives chemical and mechanical resistance, the second finishing layer of polyester powder ensures resistance. Also available in anodized finishes. Klein Pro is compatible with existing "Klein" fixing plate.



### Klein Pro H 900 mm

designed by FLOS Outdoor

220/240V power supply integrated. Solid surface or ground installation accessory to be ordered separately. Each luminaire is equipped with a segment of 1 m outgoing cable and a wiring kit.

## ELECTRICAL


<b>Transformer type</b>	Electronic
<b>Transformer availability</b>	Included
<b>Transformer mounting</b>	Integral
<b>Emergency</b>	Without
<b>Voltage (V)</b>	220/240

## PHYSICAL



<b>IK rating</b>	07
<b>Aiming</b>	Fixed
<b>Weight (kg)</b>	1,95
<b>Number of heads</b>	1

- F002B20A001 White
- F002B20A006 Grey
- F002B20A033 Anthracite
- F002B20A030 Black
- F002B20A018 Deep brown
- F002B21A070 Óxido natural
- F002B21A071 Óxido negro

## DIMENSIONS



## CERTIFICATIONS

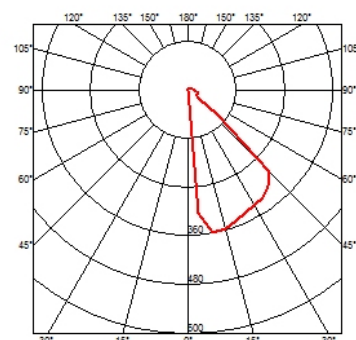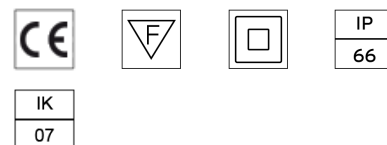

## Klein Pro H 900 mm .Accessories

### Mounting



○ F002Z030000

**Minimal Klein Pro ground fixation plate, 47x57xH160 mm**  
Klein Pro is also compatible with existing Klein ground fixing plates 85x85xH160 mm, available on request.

● F002Z010001

● F002Z010006

● F002Z010033

● F002Z010030

● F002Z010018

**Fixing base for solid surfaces**

### Decorative



● F002Z050070

● F002Z050071

● F002Z050073

**Anodized aestetcal pole screen**



### Klein Pro H 900 mm

designed by FLOS Outdoor

220/240V power supply integrated. Solid surface or ground installation accessory to be ordered separately. Each luminaire is equipped with a segment of 1 m outgoing cable and a wiring kit.

● F002B20A001 White

● F002B20A006 Grey

● F002B20A033 Anthracite

● F002B20A030 Black

● F002B20A018 Deep brown


● F002B21A070 Óxido natural

● F002B21A071 Óxido negro

### DIMENSIONS




### CERTIFICATIONS

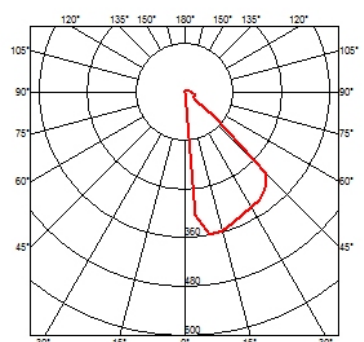

# FLOS

## Klein Pro H 900 mm .Accessories

### Electrical



○ F990E00A000

### Surge protection device

Surge protection device.  
275Vac. Maximum discharge current 10kA (8/20us).  
Maximum operating current 5A. Suitable for series connection. IP66.

## Klein Pro H 900 mm .Lamps



### Power LED

### Lamp category:

LED

### Socket:

Special base

### Lamp type:

Power LED




## Klein Pro H 900 mm

designed by FLOS Outdoor

220/240V power supply integrated.  
Solid surface or ground installation accessory to be ordered separately.  
Each luminaire is equipped with a segment of 1 m outgoing cable and a wiring kit.

- F002B20A001 White
- F002B20A006 Grey
- F002B20A033 Anthracite
- F002B20A030 Black
- F002B20A018 Deep brown
- F002B21A070 Óxido natural
- F002B21A071 Óxido negro

### DIMENSIONS



### CERTIFICATIONS

