

KLEIN PRO H 900 MM DIMMABLE I-10V

Beam angle	45°
Mounting	Ground, Floor
Lamps description	Power LED: 11W - 1089 lm ≠ FIXT 292 lm - 2700K/CRI 80 - 220-240V
Environment	Outdoor
Technical description	The body of Klein Pro bollard is made of extruded aluminium, base and diffuser in die-cast aluminium EN AB-47100 with a low copper content. High-resistance coating: the external coating is applied with a double layer with epoxy powders according to the QUALICOAT standard. The first layer of epoxy powder gives chemical and mechanical resistance, the second finishing layer of polyester powder ensures resistance. Also available in anodized finishes. Klein Pro is compatible with existing "Klein" fixing plate.



Klein Pro H 900 mm Dimmable I-10V

designed by FLOS Outdoor

220/240V power supply integrated. Solid surface or ground installation accessory to be ordered separately. Each luminaire is equipped with a segment of 1 m outgoing cable and a wiring kit.

ELECTRICAL


Transformer type	Electronic dimmable I-10V
Transformer availability	Included
Transformer mounting	Integral
Emergency	Without
Voltage (V)	220/240

PHYSICAL


IK rating	07
Aiming	Fixed
Weight (kg)	1,95
Number of heads	1

- F002B20B001 White
- F002B20B006 Grey
- F002B20B033 Anthracite
- F002B20B030 Black
- F002B20B018 Deep brown
- F002B21B070 Óxido natural
- F002B21B071 Óxido negro

DIMENSIONS



CERTIFICATIONS

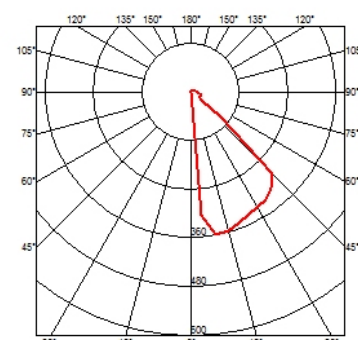

Klein Pro H 900 mm Dimmable I-I0V .Accessories

Mounting



F002Z030000

Minimal Klein Pro ground fixation plate, 47x57xH160 mm
Klein Pro is also compatible with existing Klein ground fixing plates 85x85xH160 mm, available on request.



F002Z010001



F002Z010006



F002Z010033



F002Z010030



F002Z010018

Fixing base for solid surfaces

Decorative



F002Z050070



F002Z050071



F002Z050073

Anodized aestetical pole screen



Klein Pro H 900 mm Dimmable I-I0V

designed by FLOS Outdoor

220/240V power supply integrated. Solid surface or ground installation accessory to be ordered separately. Each luminaire is equipped with a segment of 1 m outgoing cable and a wiring kit.



F002B20B001 White



F002B20B006 Grey



F002B20B033 Anthracite



F002B20B030 Black



F002B20B018 Deep brown




F002B21B070 Óxido natural




F002B21B071 Óxido negro

DIMENSIONS



CERTIFICATIONS

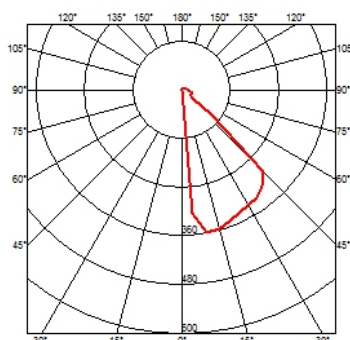

Klein Pro H 900 mm Dimmable I-10V .Accessories

Electrical



○ F990E00A000

Surge protection device

Surge protection device.
275Vac. Maximum discharge
current 10kA (8/20us).
Maximum operating current
5A. Suitable for series
connection. IP66.

Klein Pro H 900 mm Dimmable I-10V .Lamps



Power LED

Lamp category:

LED

Socket:

Special base

Lamp type:

Power LED




Klein Pro H 900 mm Dimmable I-10V

designed by FLOS Outdoor

220/240V power supply integrated.
Solid surface or ground installation
accessory to be ordered separately.
Each luminaire is equipped with a
segment of 1 m outgoing cable and a
wiring kit.

- F002B20B001 White
- F002B20B006 Grey
- F002B20B033 Anthracite
- F002B20B030 Black
- F002B20B018 Deep brown
- F002B21B070 Óxido natural
- F002B21B071 Óxido negro

DIMENSIONS



CERTIFICATIONS

