

## KLEIN PRO H 900 MM DALI

<b>Beam angle</b>	45°
<b>Mounting</b>	Ground, Floor
<b>Lamps description</b>	Power LED: 11W - 1089 lm ≠ FIXT 292 lm - 2700K/CRI 80 - 220-240V
<b>Environment</b>	Outdoor
<b>Technical description</b>	<span>The body of Klein Pro bollard is made of extruded aluminium, base and diffuser in die-cast aluminium EN AB-47100 with a low copper content. High-resistance coating: the external coating is applied with a double layer with epoxy powders according to the QUALICOAT standard. The first layer of epoxy powder gives chemical and mechanical resistance, the second finishing layer of polyester powder ensures resistance. Also available in anodized finishes. Klein Pro is compatible with existing "Klein" fixing plate.</span>



### Klein Pro H 900 mm Dali

designed by FLOS Outdoor

220/240V power supply integrated. Solid surface or ground installation accessory to be ordered separately. Each luminaire is equipped with a segment of 1 m outgoing cable and a wiring kit.

## ELECTRICAL

<b>Transformer type</b>	Electronic dimmable dali
<b>Transformer availability</b>	Included
<b>Transformer mounting</b>	Integral
<b>Emergency</b>	Without
<b>Voltage (V)</b>	220/240

## PHYSICAL



<b>IK rating</b>	07
<b>Aiming</b>	Fixed
<b>Weight (kg)</b>	1,95
<b>Number of heads</b>	1

- F002B20D001 White
- F002B20D006 Grey
- F002B20D033 Anthracite
- F002B20D030 Black
- F002B20D018 Deep brown
- F002B21D070 Óxido natural
- F002B21D071 Óxido negro

## DIMENSIONS



## CERTIFICATIONS

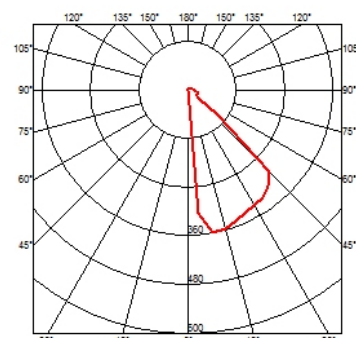

## Klein Pro H 900 mm Dali .Accessories

### Mounting



○ F002Z030000

**Minimal Klein Pro ground fixation plate, 47x57xH160 mm**  
Klein Pro is also compatible with existing Klein ground fixing plates 85x85xH160 mm, available on request.

● F002Z010001

● F002Z010006

● F002Z010033

● F002Z010030

● F002Z010018

**Fixing base for solid surfaces**



### Klein Pro H 900 mm Dali

designed by FLOS Outdoor

220/240V power supply integrated. Solid surface or ground installation accessory to be ordered separately. Each luminaire is equipped with a segment of 1 m outgoing cable and a wiring kit.

● F002B20D001 White

● F002B20D006 Grey

● F002B20D033 Anthracite


● F002B20D030 Black

● F002B20D018 Deep brown

● F002B21D070 Óxido natural

● F002B21D071 Óxido negro

### DIMENSIONS



### CERTIFICATIONS



### Decorative




● F002Z050070

● F002Z050071

● F002Z050073

**Anodized aesthetical pole screen**

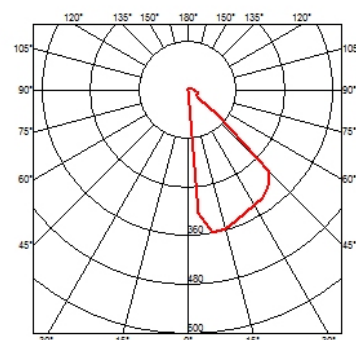

## Klein Pro H 900 mm Dali . Accessories

### Electrical



○ F990E00A000

### Surge protection device

Surge protection device.  
275Vac. Maximum discharge  
current 10kA (8/20us).  
Maximum operating current  
5A. Suitable for series  
connection. IP66.

## Klein Pro H 900 mm Dali . Lamps



### Power LED

### Lamp category:

LED

### Socket:

Special base

### Lamp type:

Power LED



## Klein Pro H 900 mm Dali

designed by FLOS Outdoor

220/240V power supply integrated.  
Solid surface or ground installation  
accessory to be ordered separately.  
Each luminaire is equipped with a  
segment of 1 m outgoing cable and a  
wiring kit.

- F002B20D001 White
- F002B20D006 Grey
- F002B20D033 Anthracite
- F002B20D030 Black
- F002B20D018 Deep brown
- F002B21D070 Óxido natural
- F002B21D071 Óxido negro

### DIMENSIONS



### CERTIFICATIONS

