

KLEIN PRO H 900 MM DIMMABLE I-10V

Beam angle	45°
Mounting	Ground, Floor
Lamps description	Power LED: 11W - 1126 lm ≠ FIXT 304 lm - 3000K/CRI 80 - 220-240V
Environment	Outdoor
Technical description	The body of Klein Pro bollard is made of extruded aluminium, base and diffuser in die-cast aluminium EN AB-47100 with a low copper content. High-resistance coating: the external coating is applied with a double layer with epoxy powders according to the QUALICOAT standard. The first layer of epoxy powder gives chemical and mechanical resistance, the second finishing layer of polyester powder ensures resistance. Also available in anodized finishes. Klein Pro is compatible with existing "Klein" fixing plate.



Klein Pro H 900 mm Dimmable I-10V designed by FLOS Outdoor

220/240V power supply integrated. Solid surface or ground installation accessory to be ordered separately. Each luminaire is equipped with a segment of 1 m outgoing cable and a wiring kit.

ELECTRICAL


Transformer type	Electronic dimmable I-10V
Transformer availability	Included
Transformer mounting	Integral
Emergency	Without
Voltage (V)	220/240

- F002B30B001 White
- F002B30B006 Grey
- F002B30B033 Anthracite
- F002B30B030 Black
- F002B30B018 Deep brown
- F002B31B070 Óxido natural
- F002B31B071 Óxido negro



PHYSICAL

IK rating	07
Aiming	Fixed
Weight (kg)	1,95
Number of heads	1

DIMENSIONS



CERTIFICATIONS

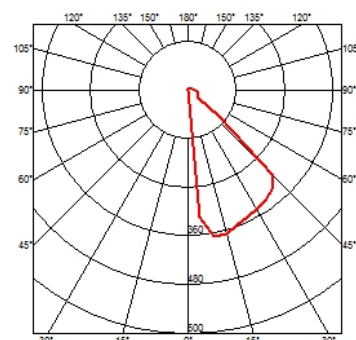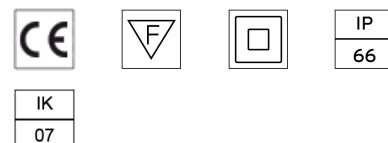

Klein Pro H 900 mm Dimmable I-10V .Accessories

Mounting



○ F002Z030000

Minimal Klein Pro ground fixation plate, 47x57xH160 mm
Klein Pro is also compatible with existing Klein ground fixing plates 85x85xH160 mm, available on request.

● F002Z010001

● F002Z010006

● F002Z010033

● F002Z010030

● F002Z010018

Fixing base for solid surfaces

Decorative



● F002Z050070

● F002Z050071

● F002Z050073

Anodized aestetcal pole screen



Klein Pro H 900 mm Dimmable I-10V

designed by FLOS Outdoor

220/240V power supply integrated. Solid surface or ground installation accessory to be ordered separately. Each luminaire is equipped with a segment of 1 m outgoing cable and a wiring kit.

● F002B30B001 White

● F002B30B006 Grey

● F002B30B033 Anthracite


● F002B30B030 Black

● F002B30B018 Deep brown


● F002B31B070 Óxido natural

● F002B31B071 Óxido negro

DIMENSIONS




CERTIFICATIONS

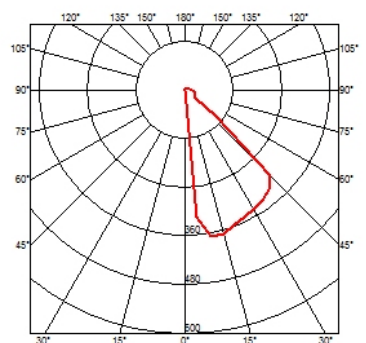

FLOS

Klein Pro H 900 mm Dimmable I-10V .Accessories

Electrical

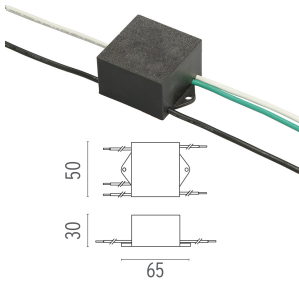

○ F990E00A000

Surge protection device

Surge protection device.
275Vac. Maximum discharge current 10KA (8/20us).
Maximum operating current 5A. Suitable for series connection. IP66.

Klein Pro H 900 mm Dimmable I-10V .Lamps



Power LED

Lamp category:

LED

Socket:

Special base

Lamp type:

Power LED




Klein Pro H 900 mm Dimmable I-10V

designed by FLOS Outdoor

220/240V power supply integrated.
Solid surface or ground installation accessory to be ordered separately.
Each luminaire is equipped with a segment of 1 m outgoing cable and a wiring kit.

- F002B30B001 White
- F002B30B006 Grey
- F002B30B033 Anthracite
- F002B30B030 Black
- F002B30B018 Deep brown
- F002B31B070 Óxido natural
- F002B31B071 Óxido negro

DIMENSIONS



CERTIFICATIONS

