

KLEIN PRO H 900 MM DIMMABLE I-I0V

| | |
|------------------------------|--|
| Beam angle | 45° |
| Mounting | Ground, Floor |
| Lamps description | Power LED: 11W - 1211 lm ≠ FIXT 325 lm - 4000K/CRI 80 - 220-240V |
| Environment | Outdoor |
| Technical description | The body of Klein Pro bollard is made of extruded aluminium, base and diffuser in die-cast aluminium EN AB-47100 with a low copper content. High-resistance coating: the external coating is applied with a double layer with epoxy powders according to the QUALICOAT standard. The first layer of epoxy powder gives chemical and mechanical resistance, the second finishing layer of polyester powder ensures resistance. Also available in anodized finishes. Klein Pro is compatible with existing "Klein" fixing plate. |



Klein Pro H 900 mm Dimmable I-I0V

designed by FLOS Outdoor

220/240V power supply integrated. Solid surface or ground installation accessory to be ordered separately. Each luminaire is equipped with a segment of 1 m outgoing cable and a wiring kit.

ELECTRICAL

| | |
|---------------------------------|---------------------------|
| Transformer type | Electronic dimmable I-I0V |
| Transformer availability | Included |
| Transformer mounting | Integral |
| Emergency | Without |
| Voltage (V) | 220/240 |

PHYSICAL



| | |
|------------------------|-------|
| IK rating | 07 |
| Aiming | Fixed |
| Weight (kg) | 1,95 |
| Number of heads | 1 |

- F002B40B001 White
- F002B40B006 Grey
- F002B40B033 Anthracite
- F002B40B030 Black
- F002B40B018 Deep brown
- F002B41B070 Óxido natural
- F002B41B071 Óxido negro

DIMENSIONS



CERTIFICATIONS

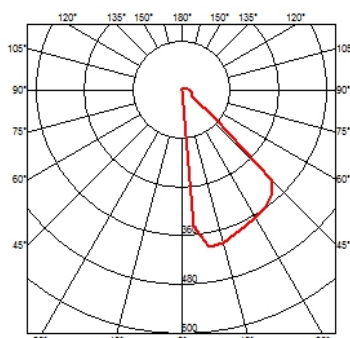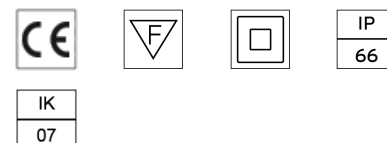

Klein Pro H 900 mm Dimmable I-I0V .Accessories

Mounting



○ F002Z030000

Minimal Klein Pro ground fixation plate, 47x57xH160 mm
Klein Pro is also compatible with existing Klein ground fixing plates 85x85xH160 mm, available on request.

● F002Z010001

● F002Z010006

● F002Z010033

● F002Z010030

● F002Z010018

Fixing base for solid surfaces



Klein Pro H 900 mm Dimmable I-I0V

designed by FLOS Outdoor

220/240V power supply integrated. Solid surface or ground installation accessory to be ordered separately. Each luminaire is equipped with a segment of 1 m outgoing cable and a wiring kit.

● F002B40B001 White

● F002B40B006 Grey

● F002B40B033 Anthracite


● F002B40B030 Black

● F002B40B018 Deep brown

● F002B41B070 Óxido natural

● F002B41B071 Óxido negro

DIMENSIONS



Decorative




● F002Z050070

● F002Z050071

● F002Z050073

Anodized aesthetical pole screen

CERTIFICATIONS

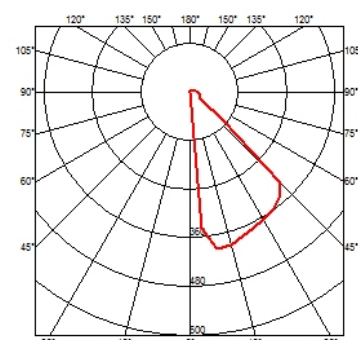

Klein Pro H 900 mm Dimmable I-10V .Accessories

Electrical



○ F990E00A000

Surge protection device

Surge protection device.
275Vac. Maximum discharge
current 10kA (8/20us).
Maximum operating current
5A. Suitable for series
connection. IP66.

Klein Pro H 900 mm Dimmable I-10V .Lamps



Power LED

Lamp category:

LED

Socket:

Special base

Lamp type:

Power LED



Klein Pro H 900 mm Dimmable I-10V

designed by FLOS Outdoor

220/240V power supply integrated.
Solid surface or ground installation
accessory to be ordered separately.
Each luminaire is equipped with a
segment of 1 m outgoing cable and a
wiring kit.

- F002B40B001 White
- F002B40B006 Grey
- F002B40B033 Anthracite
- F002B40B030 Black
- F002B40B018 Deep brown
- F002B41B070 Óxido natural
- F002B41B071 Óxido negro

DIMENSIONS



CERTIFICATIONS

