

KLEIN PRO H 900 MM DALI

Beam angle	45°
Mounting	Ground, Floor
Lamps description	Power LED: 11W - 1211 lm ≠ FIXT 325 lm - 4000K/CRI 80 - 220-240V
Environment	Outdoor
Technical description	The body of Klein Pro bollard is made of extruded aluminium, base and diffuser in die-cast aluminium EN AB-47100 with a low copper content. High-resistance coating: the external coating is applied with a double layer with epoxy powders according to the QUALICOAT standard. The first layer of epoxy powder gives chemical and mechanical resistance, the second finishing layer of polyester powder ensures resistance. Also available in anodized finishes. Klein Pro is compatible with existing "Klein" fixing plate.



Klein Pro H 900 mm Dali

designed by FLOS Outdoor

220/240V power supply integrated. Solid surface or ground installation accessory to be ordered separately. Each luminaire is equipped with a segment of 1 m outgoing cable and a wiring kit.

ELECTRICAL

Transformer type	Electronic dimmable dali
Transformer availability	Included
Transformer mounting	Integral
Emergency	Without
Voltage (V)	220/240

PHYSICAL



IK rating	07
Aiming	Fixed
Weight (kg)	1,95
Number of heads	1

- F002B40D001 White
- F002B40D006 Grey
- F002B40D033 Anthracite
- F002B40D030 Black
- F002B40D018 Deep brown
- F002B41D070 Óxido natural
- F002B41D071 Óxido negro

DIMENSIONS



CERTIFICATIONS

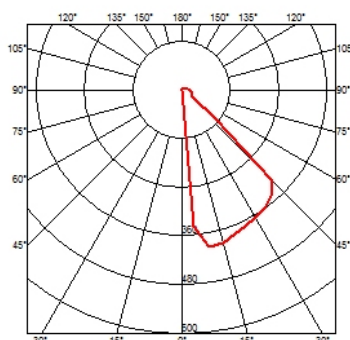

Klein Pro H 900 mm Dali .Accessories

Mounting



○ F002Z030000

Minimal Klein Pro ground fixation plate, 47x57xH160 mm

Klein Pro is also compatible with existing Klein ground fixing plates 85x85xH160 mm, available on request.

● F002Z010001

● F002Z010006

● F002Z010033

● F002Z010030

● F002Z010018

Fixing base for solid surfaces



Klein Pro H 900 mm Dali

designed by FLOS Outdoor

220/240V power supply integrated. Solid surface or ground installation accessory to be ordered separately. Each luminaire is equipped with a segment of 1 m outgoing cable and a wiring kit.

● F002B40D001 White

● F002B40D006 Grey

● F002B40D033 Anthracite


● F002B40D030 Black

● F002B40D018 Deep brown

● F002B41D070 Óxido natural

● F002B41D071 Óxido negro

DIMENSIONS



CERTIFICATIONS



Decorative




● F002Z050070

● F002Z050071

● F002Z050073

Anodized aesthetical pole screen

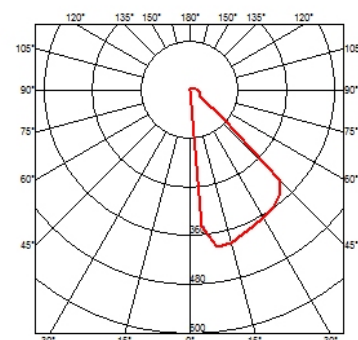

Klein Pro H 900 mm Dali . Accessories

Electrical



○ F990E00A000

Surge protection device

Surge protection device.
275Vac. Maximum discharge
current 10kA (8/20us).
Maximum operating current
5A. Suitable for series
connection. IP66.

Klein Pro H 900 mm Dali . Lamps



Power LED

Lamp category:

LED

Socket:

Special base

Lamp type:

Power LED



Klein Pro H 900 mm Dali

designed by FLOS Outdoor

220/240V power supply integrated.
Solid surface or ground installation
accessory to be ordered separately.
Each luminaire is equipped with a
segment of 1 m outgoing cable and a
wiring kit.

- F002B40D001 White
- F002B40D006 Grey
- F002B40D033 Anthracite
- F002B40D030 Black
- F002B40D018 Deep brown
- F002B41D070 Óxido natural
- F002B41D071 Óxido negro

DIMENSIONS



CERTIFICATIONS

