

## LANDLORD GROUND Ø49 2 BEAM PWM DIMMABLE

<b>Beam angle</b>	44°
<b>Mounting</b>	Ground
<b>Lamps description</b>	Power LED: 2,3W - 195 lm ≠ FIXT 17 lm - 3000K/CRI 80 - 24V
<b>Environment</b>	Outdoor
<b>Technical description</b>	IP67 luminaries for ground recessed installation, powered 24V. Body in anodised, then resined aluminium, external ring in shot-peened stainless steel, encasing the entire control electronics. Head available in two sizes, ø47 mm, and ø64 mm, with frontal or grazing emission (one, two or four beams). Frontal emission version are available with spot or medium optic, and the ø64 version is also available with integrated non removable honeycomb, for maximum visual confort. To be installed in its installation box.




### Landlord Ground Ø49 2 Beam PWM Dimmable

designed by Piero Lissoni

24V remote power supply to be ordered separately. Necessary box for installation, to be ordered separately.

● F004A34H005 Stainless steel

### DIMENSIONS

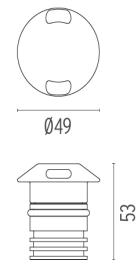

### ELECTRICAL



<b>Transformer type</b>	Electronic dimmable
<b>Transformer availability</b>	Separate item
<b>Transformer mounting</b>	Remote
<b>Emergency</b>	Without
<b>Voltage (V)</b>	24

### PHYSICAL

<b>Aiming</b>	Fixed
<b>Diameter (mm)</b>	49
<b>Weight (kg)</b>	0,30
<b>Number of heads</b>	1




### CERTIFICATIONS

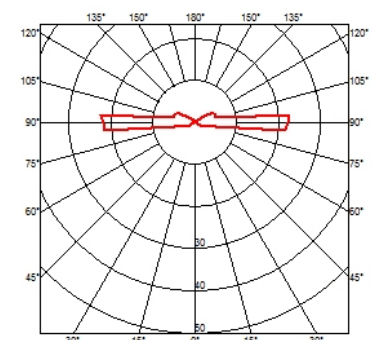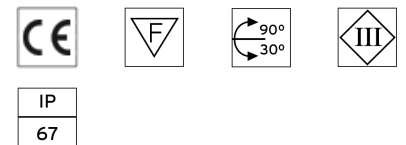

## Landlord Ground Ø49 2 Beam PWM Dimmable .Accessories

### Mounting



○ F004Z0J0000

Installation box




### Landlord Ground Ø49 2 Beam PWM Dimmable

designed by Piero Lissoni

24V remote power supply to be ordered separately. Necessary box for installation, to be ordered separately.

● F004A34H005 Stainless steel

### DIMENSIONS

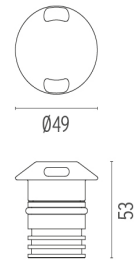

## Landlord Ground Ø49 2 Beam PWM Dimmable . Lamps



Power LED

Lamp category:

LED

Socket:

Special base

Lamp type:

Power LED

### CERTIFICATIONS



IP
67

