

LANDLORD GROUND Ø49 4 BEAM PWM DIMMABLE

Beam angle	44°
Mounting	Ground
Lamps description	Power LED: 2,3W - 202 lm ≠ FIXT 36 lm - 4000K/CRI 80 - 24V
Environment	Outdoor
Technical description	IP67 luminaries for ground recessed installation, powered 24V. Body in anodised, then resined aluminium, external ring in shot-peened stainless steel, encasing the entire control electronics. Head available in two sizes, Ø47 mm, and Ø64 mm, with frontal or grazing emission (one, two or four beams). Frontal emission version are available with spot or medium optic, and the Ø64 version is also available with integrated non removable honeycomb, for maximum visual confort. To be installed in its installation box.




Landlord Ground Ø49 4 Beam PWM Dimmable

designed by Piero Lissoni

24V remote power supply to be ordered separately. Necessary box for installation, to be ordered separately.

● F004A45H005 Stainless steel

DIMENSIONS

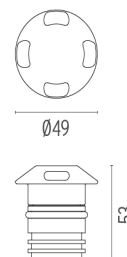

ELECTRICAL

Transformer type	Electronic dimmable
Transformer availability	Separate item
Transformer mounting	Remote
Emergency	Without
Voltage (V)	24

PHYSICAL


Aiming	Fixed
Diameter (mm)	49
Weight (kg)	0,30
Number of heads	1



CERTIFICATIONS




IP
67

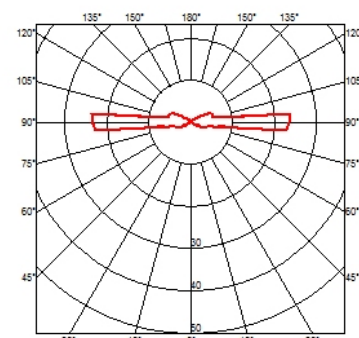

Landlord Ground Ø49 4 Beam PWM Dimmable .Accessories

Mounting



○ F004Z0J0000

Installation box




Landlord Ground Ø49 4 Beam PWM Dimmable

designed by Piero Lissoni

24V remote power supply to be ordered separately. Necessary box for installation, to be ordered separately.

● F004A45H005 Stainless steel

DIMENSIONS



Landlord Ground Ø49 4 Beam PWM Dimmable . Lamps



Power LED

Lamp category:

LED

Socket:

Special base

Lamp type:

Power LED

CERTIFICATIONS



IP
67

