

CAMOUFLAGE 140 MM

Beam angle	157°
Mounting	Wall surface
Lamps description	Mid-Power Led: 8W - 786 lm ≠ FIXT 474 lm - 2700K/CRI 80 - 24V
Environment	Indoor, Outdoor
Notes	We recommend using a connection system with a degree of protection greater than or equal to the degree of protection of the luminaire.

Technical description










Dissipating aluminum body with diffuser in transparent polycarbonate. The Crema d'Orcia and Basaltina stone finishes are made by fastening high-strength, high-resistance adhesive to a stone plate created by means of mechanical machining from a solid block. The concrete finishing is made by fastening a poured cement plate reinforced with fiberglass using a single component high strength, high-resistance adhesive. The Primer version is painted after installation with normal water-based colors (tempera, stucco, water-based paints) to ensure maximum uniformity with the architecture. The aluminum versions are finished with a high-resistance coating: after a sandblasting treatment of all components to make the surface porous and ensure a greater adhesion of the paint, the external coating is applied with a double layer with epoxy powders according to the QUALICOAT standard. The first layer of epoxy powder gives chemical and mechanical resistance, the second finishing layer of polyester powder ensures resistance to UV rays and atmospheric agents. The painted surfaces are treated with alkaline and acidic washes, then rinsed with demineralized water, subjected to a chemical conversion treatment to protect against oxidation. Upon commercial and technical evaluation, it is possible to create customized versions with other materials on request.



Camouflage 140 mm

designed by Piero Lissoni

Collection of products for outdoor use, for wall installation with LED light source. 24V power source not included. Includes power cable of 100 mm. The driver can be installed remotely (remote housing not required) or housed at the back of the luminaire by means of a suitable optional remote housing.

	FI310000	Primer
	FI310001	White
	FI310006	Grey
	FI310018	Deep brown
	FI310030	Black
	FI310033	Anthracite
	FI310087	Basaltina Stone
	FI310089	Concrete
	FI310090	Crema d'orcica stone


ELECTRICAL

Transformer type	Electronic
Transformer availability	Separate item
Transformer mounting	Integral, Remote
Emergency	Without
Voltage (V)	24

PHYSICAL


Aiming	Fixed
Diameter (mm)	140
Weight (kg)	max 0,45
Number of heads	1

DIMENSIONS



*Concrete, crema d'orcica, basaltina H = 35 mm.



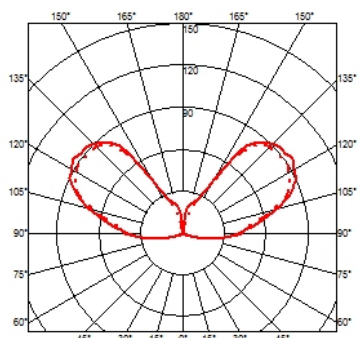






CERTIFICATIONS






Camouflage 140 mm designed by Piero Lissoni

Collection of products for outdoor use, for wall installation with LED light source. 24V power source not included. Includes power cable of 100 mm. The driver can be installed remotely (remote housing not required) or housed at the back of the luminaire by means of a suitable optional remote housing.


-  FI310000 Primer
-  FI310001 White
-  FI310006 Grey
-  FI310018 Deep brown
-  FI310030 Black
-  FI310033 Anthracite
-  FI310087 Basaltina Stone
-  FI310089 Concrete
-  FI310090 Crema d'orcina stone

DIMENSIONS



*Concrete, crema d'orcina, basaltina H = 35 mm.

CERTIFICATIONS

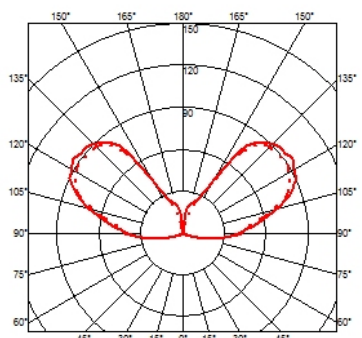

Camouflage 140 mm .Accessories

Power Supply



 RF25747

Power supply 10W

Power supply for remote installation 24V 10W / 110-240V IP20 Class II selv.



 RF25750

Power supply 17W

Power supply for remote installation 24V DC 17W / 110-240V (15W 110V) IP20 Class II selv.



 RF25755

Power supply 50W

Power supply for remote installation 24V DC 50W / 120-240V IP67 Class II selv.

Camouflage 140 mm .Accessories



RF25749

Power supply 70W


Power supply for remote installation 24V DC 70W / 220-240V IP67 Class II selv.



RF25756

Power supply 100W

Power supply for remote installation 24V DC 100W / 120-240V IP67 Class II selv.



RF25748

Power supply 8W

Power supply for remote installation 24V 8W / 110-240V IP65 Class II selv.



Camouflage 140 mm designed by Piero Lissoni

Collection of products for outdoor use, for wall installation with LED light source. 24V power source not included. Includes power cable of 100 mm. The driver can be installed remotely (remote housing not required) or housed at the back of the luminaire by means of a suitable optional remote housing.




RF25752

Power supply 20W

Power supply for remote installation 24V DC 20W / 220-240V IP67 Class II selv.

- F1310000 Primer
- F1310001 White
- F1310006 Grey
- F1310018 Deep brown
- F1310030 Black
- F1310033 Anthracite
- F1310087 Basaltina Stone
- F1310089 Concrete
- F1310090 Crema d'orcina stone

DIMENSIONS



*Concrete, crema d'orcina, basaltina H = 35 mm.

CERTIFICATIONS




Mounting



F1318000

Installation box

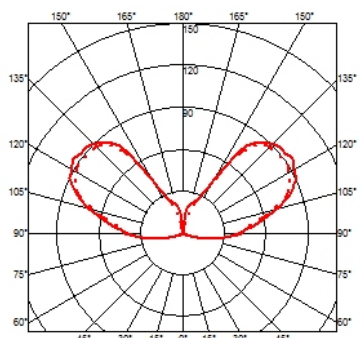

FLOS

Camouflage 140 mm . Lamps



Mid-Power LED

Lamp category:
LED

Socket:
Special base










Lamp type:
Power LED




Camouflage 140 mm

designed by Piero Lissoni

Collection of products for outdoor use, for wall installation with LED light source. 24V power source not included. Includes power cable of 100 mm. The driver can be installed remotely (remote housing not required) or housed at the back of the luminaire by means of a suitable optional remote housing.

	F1310000	Primer
	F1310001	White
	F1310006	Grey
	F1310018	Deep brown
	F1310030	Black
	F1310033	Anthracite
	F1310087	Basaltina Stone
	F1310089	Concrete
	F1310090	Crema d'orcina stone

DIMENSIONS



*Concrete, crema d'orcina, basaltina H = 35 mm.

CERTIFICATIONS

