

## CAMOUFLAGE 240 MM

<b>Beam angle</b>	151°
<b>Mounting</b>	Wall surface
<b>Lamps description</b>	Mid-Power Led: 12W - 1281 lm ≠ FIXT 773 lm - 2700K/CRI 80 - 220-240V
<b>Environment</b>	Indoor, Outdoor
<b>Notes</b>	We recommend using a connection system with a degree of protection greater than or equal to the degree of protection of the luminaire.

**Technical description**

Dissipating aluminum body with diffuser in transparent polycarbonate. The Crema d'Orcia and Basaltina stone finishes are made by fastening high-strength, high-resistance adhesive to a stone plate created by means of mechanical machining from a solid block. The concrete finishing is made by fastening a poured cement plate reinforced with fiberglass using a single component high strength, high-resistance adhesive. The Primer version is painted after installation with normal water-based colors (tempera, stucco, water-based paints) to ensure maximum uniformity with the architecture. The aluminum versions are finished with a high-resistance coating: after a sandblasting treatment of all components to make the surface porous and ensure a greater adhesion of the paint, the external coating is applied with a double layer with epoxy powders according to the QUALICOAT standard. The first layer of epoxy powder gives chemical and mechanical resistance, the second finishing layer of polyester powder ensures resistance to UV rays and atmospheric agents. The painted surfaces are treated with alkaline and acidic washes, then rinsed with demineralized water, subjected to a chemical conversion treatment to protect against oxidation. Upon commercial and technical evaluation, it is possible to create customized versions with other materials on request.

### ELECTRICAL

<b>Transformer type</b>	Electronic
<b>Transformer availability</b>	Included
<b>Transformer mounting</b>	Integral
<b>Emergency</b>	Without
<b>Voltage (V)</b>	220/240

### PHYSICAL










<b>Aiming</b>	Fixed
<b>Diameter (mm)</b>	240
<b>Weight (kg)</b>	max 1,50
<b>Number of heads</b>	1




### Camouflage 240 mm

designed by Piero Lissoni

Collection of products for outdoor use, for wall installation with LED light source. Integrated 220/240V power source. Supplied with a 1000 mm section of outgoing neoprene cable. Version 110V upon request.


	FI315000	Primer
	FI315001	White
	FI315006	Grey
	FI315018	Deep brown
	FI315030	Black
	FI315033	Anthracite
	FI315087	Basaltina Stone
	FI315089	Concrete
	FI315090	Crema d'orcica stone

### DIMENSIONS



\*Concrete, crema d'orcica, basaltina H = 48 mm.

### CERTIFICATIONS

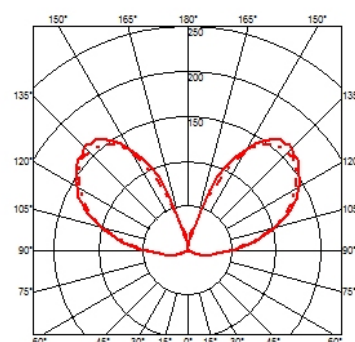



## Camouflage 240 mm . Lamps



### Mid-Power LED

#### Lamp category:

LED

#### Socket:

Special base

#### Lamp type:










Power LED




### Camouflage 240 mm

designed by Piero Lissoni

Collection of products for outdoor use, for wall installation with LED light source. Integrated 220/240V power source. Supplied with a 1000 mm section of outgoing neoprene cable. Version 110V upon request.

	FI315000	Primer
	FI315001	White
	FI315006	Grey
	FI315018	Deep brown
	FI315030	Black
	FI315033	Anthracite
	FI315087	Basaltina Stone
	FI315089	Concrete
	FI315090	Crema d'orcina stone

### DIMENSIONS



\*Concrete, crema d'orcina, basaltina H = 48 mm.

### CERTIFICATIONS

