

## FENESTRA 24V

<b>Beam angle</b>	151°
<b>Mounting</b>	Floor
<b>Lamps description</b>	Power Led: 4W - 274 lm ≠ FIXT 165 lm - 2700K/CRI 80 - 12-24V
<b>Environment</b>	Indoor, Outdoor
<b>Notes</b>	We recommend using a connection system with a degree of protection greater than or equal to the degree of protection of the luminaire.

<b>Technical description</b>	Luminaire body in die-cast aluminum EN AB-47100 (low copper content). High-resistance coating: after a sandblasting treatment of all components to make the surface porous and ensure a greater adhesion of the paint, the external coating is applied with a double layer with epoxy powders according to the QUALICOAT standard. The first layer of epoxy powder gives chemical and mechanical resistance, the second finishing layer of polyester powder ensures resistance to UV rays and atmospheric agents. The painted surfaces are treated with alkaline and acidic washes, then rinsed with demineralized water, subjected to a chemical conversion treatment to protect against oxidation. Thanks to the use of a dual LED source and two laminar emitting lenses, it guarantees a coverage of 270° with homogeneous distribution and excellent color uniformity. UV-stabilized polycarbonate diffuser, silicone seal. Each luminaire is equipped with a mechanical adjustment system to compensate for the inclination of the sills, and to allow the correct orientation of the luminous beam.
------------------------------	--



### Fenestra 24V

designed by FLOS Outdoor

Luminaire for outdoor use for installation in a window compartment with LED light source. 24V power source not included. Possible to use standard 12V power supply. Equipped with a 1000 mm section of outgoing neoprene cable.

● F2250001	White
● F2250006	Grey
● F2250033	Anthracite
● F2250030	Black
● F2250018	Deep brown


### ELECTRICAL

<b>Transformer type</b>	Electronic
<b>Transformer availability</b>	Separate item
<b>Transformer mounting</b>	Remote
<b>Emergency</b>	Without
<b>Voltage (V)</b>	24



### PHYSICAL

<b>IK rating</b>	08
<b>Aiming</b>	Fixed
<b>Weight (kg)</b>	0,50
<b>Number of heads</b>	1

### DIMENSIONS

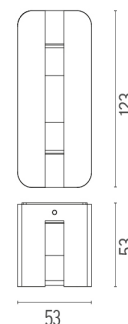

### CERTIFICATIONS

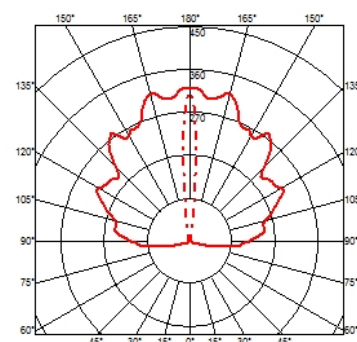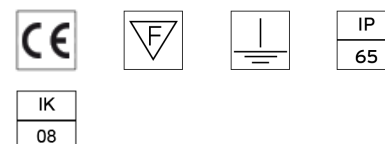



**Fenestra 24V .Accessories**




**Fenestra 24V**  
designed by FLOS Outdoor



Luminaire for outdoor use for installation in a window compartment with LED light source. 24V power source not included. Possible to use standard 12V power supply. Equipped with a 1000 mm section of outgoing neoprene cable.

- F2250001 White
- F2250006 Grey
- F2250033 Anthracite
- F2250030 Black
- F2250018 Deep brown


**DIMENSIONS**

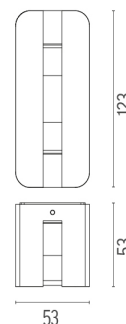

**CERTIFICATIONS**

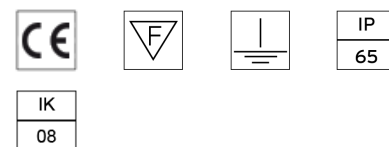

**Power Supply**



○ RF25748

**Power supply 8W**

Power supply for installation in the installation box 24V 8W / I 10-240V IP65 Class II selv.



○ RF25747

**Power supply 10W**

Power supply for remote installation 24V 10W / I 10-240V IP20 Class II selv.



○ RF25755

**Power supply 50W**

Power supply for remote installation 24V DC 50W / I 20-240V IP67 Class II selv.

# FLOS

## Fenestra 24V .Accessories



RF25749

### Power supply 70W

Power supply for remote installation 24V DC 70W / 220-240V IP67 Class II selv.



RF25754

### Power supply 8W

Power supply 24V 8W / 110-240V IP20 Class II selv.



RF25757

### Power supply 10W

Power supply 24V 10W / 110-240V IP67 Class II selv.




## Fenestra 24V

designed by FLOS Outdoor

Luminaire for outdoor use for installation in a window compartment with LED light source. 24V power source not included. Possible to use standard 12V power supply. Equipped with a 1000 mm section of outgoing neoprene cable.

- F2250001 White
- F2250006 Grey
- F2250033 Anthracite
- F2250030 Black
- F2250018 Deep brown

## DIMENSIONS



## CERTIFICATIONS



## Fenestra 24V . Lamps



### Power LED

### Lamp category:

LED

### Socket:

Special base

### Lamp type:

Power LED

