

FENESTRA 24V

Beam angle	151°
Mounting	Floor
Lamps description	Power Led: 4W - 304 lm ≠ FIXT 183 lm - 3000K/CRI 80 - 12-24V
Environment	Indoor, Outdoor
Notes	We recommend using a connection system with a degree of protection greater than or equal to the degree of protection of the luminaire.





Technical description	Luminaire body in die-cast aluminum EN AB-47100 (low copper content). High-resistance coating: after a sandblasting treatment of all components to make the surface porous and ensure a greater adhesion of the paint, the external coating is applied with a double layer with epoxy powders according to the QUALICOAT standard. The first layer of epoxy powder gives chemical and mechanical resistance, the second finishing layer of polyester powder ensures resistance to UV rays and atmospheric agents. The painted surfaces are treated with alkaline and acidic washes, then rinsed with demineralized water, subjected to a chemical conversion treatment to protect against oxidation. Thanks to the use of a dual LED source and two laminar emitting lenses, it guarantees a coverage of 270° with homogeneous distribution and excellent color uniformity. UV-stabilized polycarbonate diffuser, silicone seal. Each luminaire is equipped with a mechanical adjustment system to compensate for the inclination of the sills, and to allow the correct orientation of the luminous beam.
------------------------------	--



Fenestra 24V

designed by FLOS Outdoor

Luminaire for outdoor use for installation in a window compartment with LED light source. 24V power source not included. Possible to use standard 12V power supply. Equipped with a 1000 mm section of outgoing neoprene cable.

	F2251001	White
	F2251006	Grey
	F2251033	Anthracite
	F2251030	Black
	F2251018	Deep brown


ELECTRICAL

Transformer type	Electronic
Transformer availability	Separate item
Transformer mounting	Remote
Emergency	Without
Voltage (V)	24



PHYSICAL

IK rating	08
Aiming	Fixed
Weight (kg)	0,50
Number of heads	1

DIMENSIONS

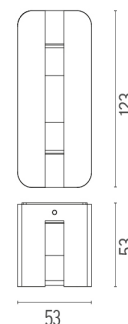

CERTIFICATIONS

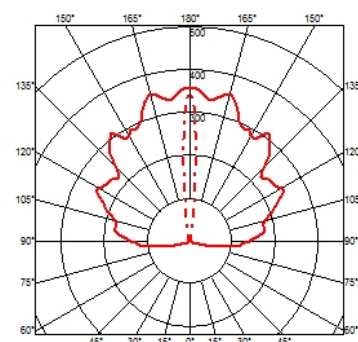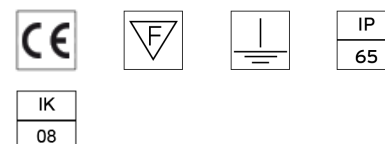



Fenestra 24V .Accessories




Fenestra 24V

designed by FLOS Outdoor



Luminaire for outdoor use for installation in a window compartment with LED light source. 24V power source not included. Possible to use standard 12V power supply. Equipped with a 1000 mm section of outgoing neoprene cable.

- F2251001 White
- F2251006 Grey
- F2251033 Anthracite
- F2251030 Black
- F2251018 Deep brown


DIMENSIONS



CERTIFICATIONS

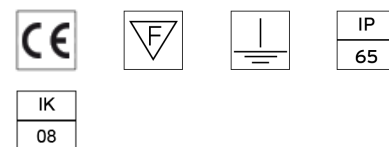

Power Supply



RF25748

Power supply 8W

Power supply for installation in the installation box 24V 8W / I 110-240V IP65 Class II selv.



RF25747

Power supply 10W

Power supply for remote installation 24V 10W / I 110-240V IP20 Class II selv.



RF25755

Power supply 50W

Power supply for remote installation 24V DC 50W / I 120-240V IP67 Class II selv.

FLOS

Fenestra 24V .Accessories



RF25749

Power supply 70W

Power supply for remote installation 24V DC 70W / 220-240V IP67 Class II selv.

RF25754

Power supply 8W

Power supply 24V 8W / 110-240V IP20 Class II selv.

RF25757

Power supply 10W

Power supply 24V 10W / 110-240V IP67 Class II selv.


Fenestra 24V

designed by FLOS Outdoor

Luminaire for outdoor use for installation in a window compartment with LED light source. 24V power source not included. Possible to use standard 12V power supply. Equipped with a 1000 mm section of outgoing neoprene cable.

- F2251001 White
- F2251006 Grey
- F2251033 Anthracite
- F2251030 Black
- F2251018 Deep brown

DIMENSIONS



CERTIFICATIONS



Fenestra 24V . Lamps



Power LED

Lamp category:

LED

Socket:

Special base

Lamp type:

Power LED

