

OUTGRAZE 48 L 600 MM

Beam angle	29°
Mounting	Ceiling surface, Wall surface
Lamps description	Power Led: 16W - 1560 lm ≠ *FIXT 1198 lm - 3000K/CRI 80 - 220-240V (*FIXT lm = Medium Optic)
Environment	Indoor, Outdoor
Notes	We recommend using a connection system with a degree of protection greater than or equal to the degree of protection of the luminaire.

Technical description	Central body in extruded aluminum, end cap in die-cast aluminum. Optics made with constant pitch between the lenses to offer a homogeneous luminous flux even in case of multiple lamps installed in a continuous line. High resistance external coating applied with a double layer of epoxy powders in accordance with the QUALICOAT standard. The first layer of epoxy powder gives chemical and mechanical resistance, the second finishing layer of polyester powder ensures resistance to UV rays and atmospheric agents. The painted surfaces are treated with alkaline and acidic washes, then rinsed with demineralized water, subjected to a chemical conversion treatment to protect against oxidation. Diffuser in extra clear transparent glass, screen-printed and glued to ensure a watertight seal. The installation of the product requires use of steel brackets, to be ordered separately. Luminaire provided with a length of approximately 1500 mm of outgoing neoprene cable on one side. On request it is possible to provide luminaires with loop-through connection for multiple installation with continuity of line.
------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------



Outgraze 48 L 600 mm

designed by FLOS Outdoor

Luminaire for outdoor use for installation on the wall or ceiling with LED light source. Integrated 220/240V power source. Installation brackets, to be ordered separately. Dimmable version on request.

● F4226001	White
● F4226006	Grey
● F4226033	Anthracite
● F4226030	Black
● F4226018	Deep brown


ELECTRICAL

Transformer type	Electronic
Transformer availability	Included
Transformer mounting	Integral
Emergency	Without
Voltage (V)	220/240



PHYSICAL

IK rating	06
Aiming	Fixed
Weight (kg)	2,55
Number of heads	1

DIMENSIONS

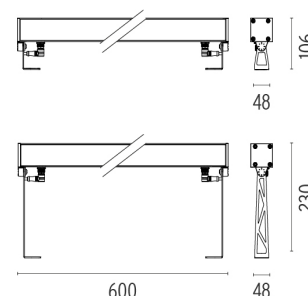

CERTIFICATIONS

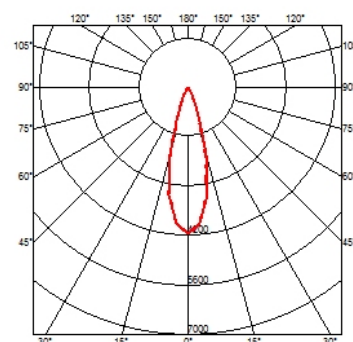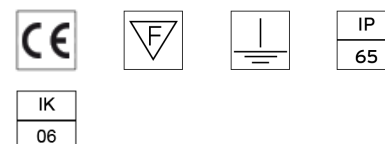



Outgraze 48 L 600 mm

designed by FLOS Outdoor

Luminaire for outdoor use for installation on the wall or ceiling with LED light source. Integrated 220/240V power source. Installation brackets, to be ordered separately. Dimmable version on request.

F4226001	White
F4226006	Grey
F4226033	Anthracite
F4226030	Black
F4226018	Deep brown

Outgraze 48 L 600 mm .Accessories

Structural




F4204001
F4204006
F4204033
F4204030
F4204018

One pair of long rods L 200 mm.


F4203001
F4203006
F4203033
F4203030
F4203018

One pair of short rods L 80 mm.

DIMENSIONS

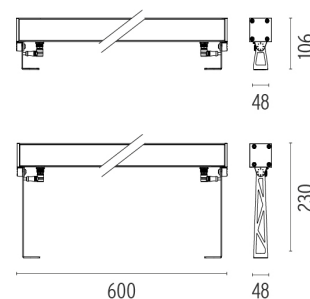

CERTIFICATIONS

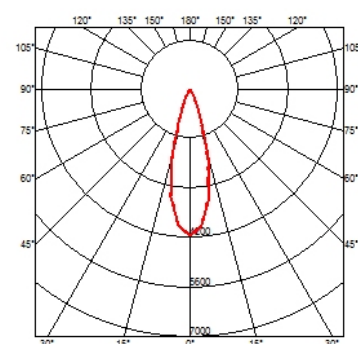

Outgraze 48 L 600 mm .Accessories

Electrical



F1206000

3/4 way terminal block 3 poles IP68

7-12 mm cables



F1205000

2 way terminal block 3 poles IP68

7-12 mm cables



Outgraze 48 L 600 mm

designed by FLOS Outdoor

Luminaire for outdoor use for installation on the wall or ceiling with LED light source. Integrated 220/240V power source. Installation brackets, to be ordered separately. Dimmable version on request.

	F4226001	White
	F4226006	Grey
	F4226033	Anthracite
	F4226030	Black
	F4226018	Deep brown

Outgraze 48 L 600 mm . Lamps




Power LED

Lamp category:
LED

Socket:
Special base

Lamp type:
Power LED

DIMENSIONS

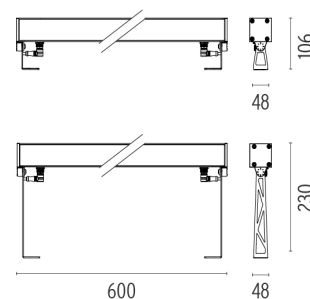

CERTIFICATIONS

