

OUTGRAZE 35 L 1200 MM

| | |
|--------------------------|--|
| Beam angle | 19° |
| Mounting | Ceiling surface, Wall surface |
| Lamps description | Power Led: 30W - 2800 lm ≠ *FIXT 2079 lm - 4000K/CRI 80 - 48V (*FIXT lm = Medium Optic) |
| Environment | Indoor, Outdoor |
| Notes | We recommend using a connection system with a degree of protection greater than or equal to the degree of protection of the luminaire. |

Technical description

Central body in extruded aluminum, end cap in die-cast aluminum. Optics made with constant pitch between the lenses to offer a homogeneous luminous flux even in case of multiple lamps installed in a continuous line. High resistance external coating applied with a double layer of epoxy powders in accordance with the QUALICOAT standard. The first layer of epoxy powder gives chemical and mechanical resistance, the second finishing layer of polyester powder ensures resistance to UV rays and atmospheric agents. The painted surfaces are treated with alkaline and acidic washes, then rinsed with demineralized water, subjected to a chemical conversion treatment to protect against oxidation. Diffuser in extra clear transparent glass, screen-printed and glued to ensure a watertight seal. The installation of the product requires use of steel brackets, to be ordered separately. Luminaire provided with a length of approximately 1500 mm of outgoing neoprene cable on one side. On request it is possible to provide luminaires with loop-through connection for multiple installation with continuity of line.



Outgraze 35 L 1200 mm

designed by FLOS Outdoor

Luminaire for outdoor use for installation on the wall or ceiling with LED light source. 48V power source not included. Driver for remote installation and installation brackets to be ordered separately. Dimmable PWM luminaires.

| | |
|------------|------------|
| ● F4249001 | White |
| ● F4249006 | Grey |
| ● F4249033 | Anthracite |
| ● F4249030 | Black |
| ● F4249018 | Deep brown |


ELECTRICAL

| | |
|---------------------------------|---------------|
| Transformer type | Electronic |
| Transformer availability | Separate item |
| Transformer mounting | Remote |
| Emergency | Without |
| Voltage (V) | 48 |



PHYSICAL

| | |
|------------------------|-------|
| IK rating | 07 |
| Aiming | Fixed |
| Weight (kg) | 2,90 |
| Number of heads | 1 |

DIMENSIONS

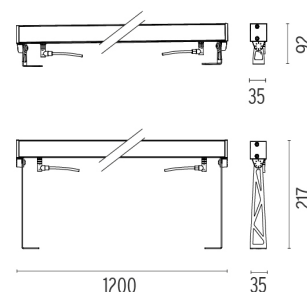

CERTIFICATIONS

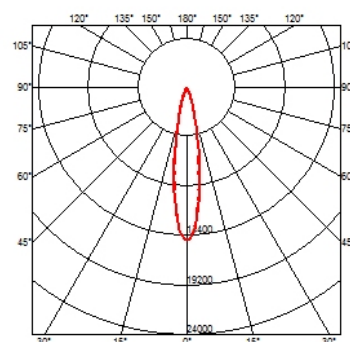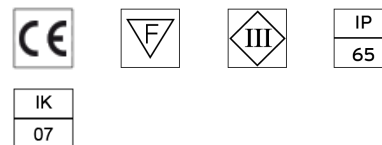



Outgraze 35 L 1200 mm

designed by FLOS Outdoor

Luminaire for outdoor use for installation on the wall or ceiling with LED light source. 48V power source not included. Driver for remote installation and installation brackets to be ordered separately. Dimmable PWM luminaires.

| | |
|----------|------------|
| F4249001 | White |
| F4249006 | Grey |
| F4249033 | Anthracite |
| F4249030 | Black |
| F4249018 | Deep brown |

Outgraze 35 L 1200 mm .Accessories

Structural




| |
|----------|
| FI204001 |
| FI204006 |
| FI204033 |
| FI204030 |
| FI204018 |

One pair of long rods L 200 mm.


| |
|----------|
| FI203001 |
| FI203006 |
| FI203033 |
| FI203030 |
| FI203018 |

One pair of short rods L 80 mm.

DIMENSIONS

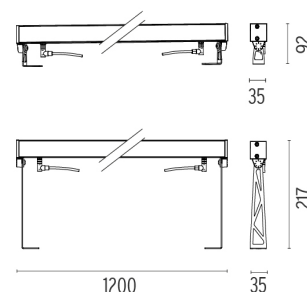


CERTIFICATIONS

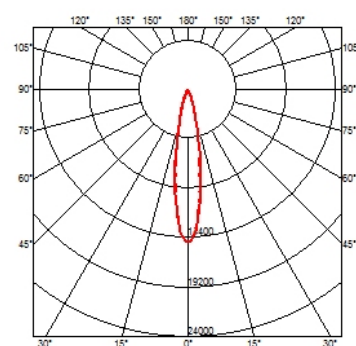

Outgraze 35 L 1200 mm .Accessories

Power Supply



RF25746

Power supply 240W

Power supply 48V 240W /
110-240V single output DIN
RAIL.



RF25753

Power supply 60W

Power supply 48V 60W /
110-240V IP67 Class I selv
eq.




Outgraze 35 L 1200 mm

designed by FLOS Outdoor

Luminaire for outdoor use for
installation on the wall or ceiling with
LED light source. 48V power source
not included. Driver for remote
installation and installation brackets to
be ordered separately. Dimmable
PWM luminaires.

| | | |
|---|----------|------------|
| ● | F4249001 | White |
| ● | F4249006 | Grey |
| ● | F4249033 | Anthracite |
| ● | F4249030 | Black |
| ● | F4249018 | Deep brown |

DIMENSIONS



CERTIFICATIONS



Electrical



FI206000

3/4 way terminal block 3 poles IP68


7-12 mm cables



FI205000

2 way terminal block 3 poles IP68

7-12 mm cables

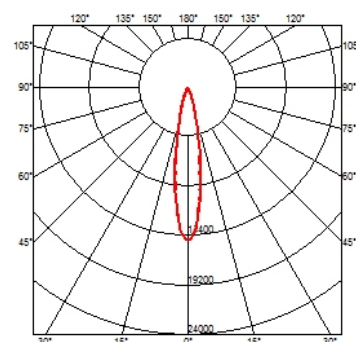

Outgraze 35 L 1200 mm . Lamps



Power LED

Lamp category:
LED

Socket:
Special base

Lamp type:
Power LED




Outgraze 35 L 1200 mm

designed by FLOS Outdoor

Luminaire for outdoor use for installation on the wall or ceiling with LED light source. 48V power source not included. Driver for remote installation and installation brackets to be ordered separately. Dimmable PWM luminaires.

| | | |
|---|----------|------------|
| ● | F4249001 | White |
| ● | F4249006 | Grey |
| ● | F4249033 | Anthracite |
| ● | F4249030 | Black |
| ● | F4249018 | Deep brown |

DIMENSIONS



CERTIFICATIONS

