

OUTGRAZE 35 L 600 MM

Beam angle	31°
Mounting	Ceiling surface, Wall surface
Lamps description	Power Led: 15W - 1300 lm ≠ *FIXT 965 lm - 3000K/CRI 80 - 48V (*FIXT lm = Medium Optic)
Environment	Indoor, Outdoor
Notes	We recommend using a connection system with a degree of protection greater than or equal to the degree of protection of the luminaire.

Technical description	Central body in extruded aluminum, end cap in die-cast aluminum. Optics made with constant pitch between the lenses to offer a homogeneous luminous flux even in case of multiple lamps installed in a continuous line. High resistance external coating applied with a double layer of epoxy powders in accordance with the QUALICOAT standard. The first layer of epoxy powder gives chemical and mechanical resistance, the second finishing layer of polyester powder ensures resistance to UV rays and atmospheric agents. The painted surfaces are treated with alkaline and acidic washes, then rinsed with demineralized water, subjected to a chemical conversion treatment to protect against oxidation. Diffuser in extra clear transparent glass, screen-printed and glued to ensure a watertight seal. The installation of the product requires use of steel brackets, to be ordered separately. Luminaire provided with a length of approximately 1500 mm of outgoing neoprene cable on one side. On request it is possible to provide luminaires with loop-through connection for multiple installation with continuity of line.
------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------



Outgraze 35 L 600 mm

designed by FLOS Outdoor

Luminaire for outdoor use for installation on the wall or ceiling with LED light source. 48V power source not included. Driver for remote installation and installation brackets to be ordered separately. Dimmable PWM luminaires.

● F4250001	White
● F4250006	Grey
● F4250033	Anthracite
● F4250030	Black
● F4250018	Deep brown


ELECTRICAL

Transformer type	Electronic
Transformer availability	Separate item
Transformer mounting	Remote
Emergency	Without
Voltage (V)	48



PHYSICAL

IK rating	05
Aiming	Fixed
Weight (kg)	1,65
Number of heads	1

DIMENSIONS

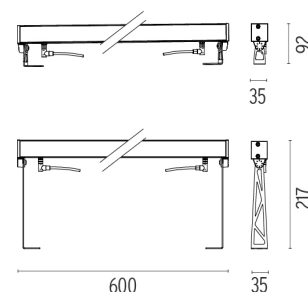

CERTIFICATIONS

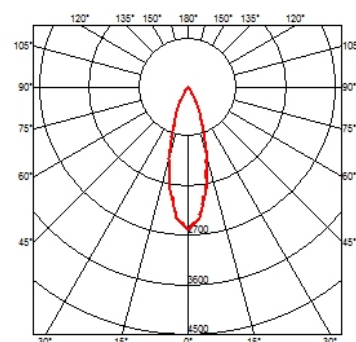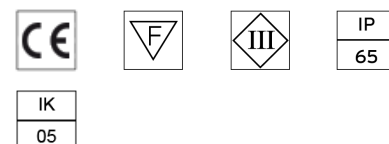



Outgraze 35 L 600 mm

designed by FLOS Outdoor

Luminaire for outdoor use for installation on the wall or ceiling with LED light source. 48V power source not included. Driver for remote installation and installation brackets to be ordered separately. Dimmable PWM luminaires.

F4250001	White
F4250006	Grey
F4250033	Anthracite
F4250030	Black
F4250018	Deep brown

Outgraze 35 L 600 mm .Accessories

Structural




FI204001
FI204006
FI204033
FI204030
FI204018

One pair of long rods L 200 mm.


FI203001
FI203006
FI203033
FI203030
FI203018

One pair of short rods L 80 mm.

DIMENSIONS

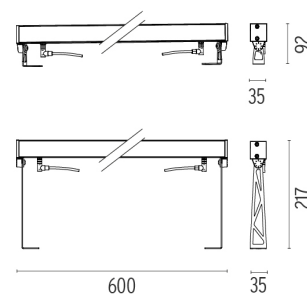


CERTIFICATIONS

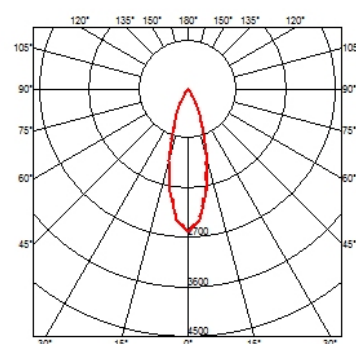

Outgraze 35 L 600 mm .Accessories

Power Supply



RF25746

Power supply 240W

Power supply 48V 240W /
I 10-240V single output DIN
RAIL.



RF25753

Power supply 60W

Power supply 48V 60W /
I 10-240V IP67 Class I selv
eq.




Outgraze 35 L 600 mm

designed by FLOS Outdoor


Luminaire for outdoor use for
installation on the wall or ceiling with
LED light source. 48V power source
not included. Driver for remote
installation and installation brackets to
be ordered separately. Dimmable
PWM luminaires.

F4250001	White
F4250006	Grey
F4250033	Anthracite
F4250030	Black
F4250018	Deep brown

DIMENSIONS

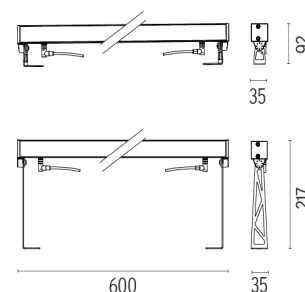

CERTIFICATIONS

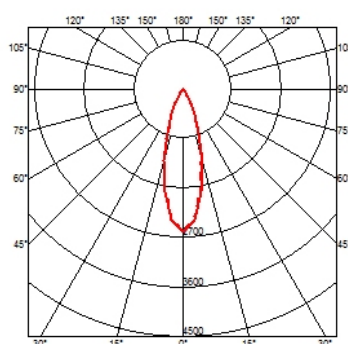

Electrical



FI206000

3/4 way terminal block 3 poles IP68

7-12 mm cables



FI205000

2 way terminal block 3 poles IP68

7-12 mm cables

Outgraze 35 L 600 mm . Lamps



Power LED

Lamp category:
LED

Socket:
Special base

Lamp type:
Power LED




Outgraze 35 L 600 mm

designed by FLOS Outdoor

Luminaire for outdoor use for installation on the wall or ceiling with LED light source. 48V power source not included. Driver for remote installation and installation brackets to be ordered separately. Dimmable PWM luminaires.

● F4250001	White
● F4250006	Grey
● F4250033	Anthracite
● F4250030	Black
● F4250018	Deep brown

DIMENSIONS



CERTIFICATIONS

